
AQUALISA LUMI[™] ELECTRIC SHOWER



9.5KW WITH ADJUSTABLE HEAD - CHROME

.....

DIMENSIONAL DRAWINGS

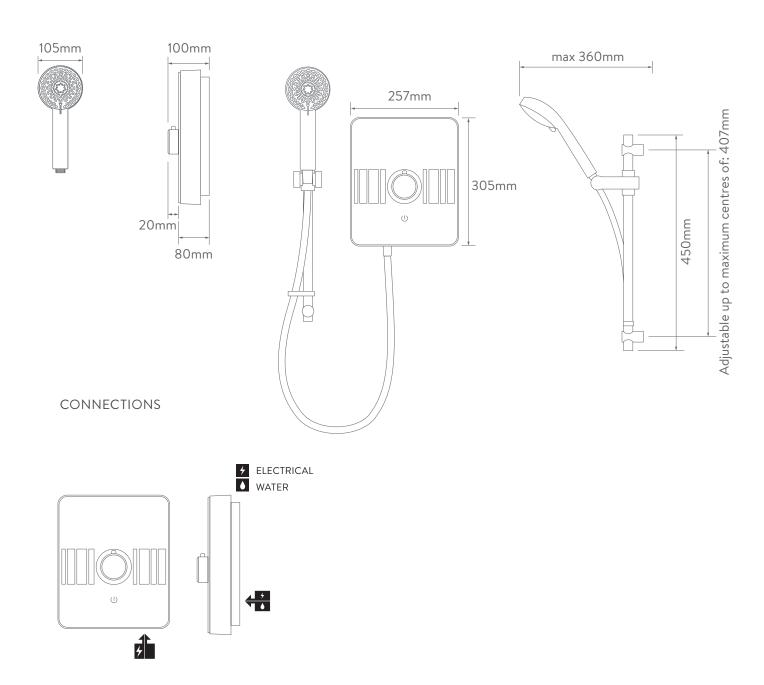

AQUALISA LUMI[™] ELECTRIC SHOWER



9.5KW WITH ADJUSTABLE HEAD - CHROME

.....

TECHNICAL SPECIFICATIONS

Power 9,5kW Minimum pressure 0.9 bar (@Blpm) Maximum pressure 10 bar Recommended Maximum pressure 3 bar Water entry points Bottom and rear right only Inlet fitting connections 15mm compression Outlet fitting connections 112" BSP thread Electrical requirements Supply voltage 230 - 240V, MCB rating 40AMP Water system Mains cold Intuitive single dial Illuminated touch start/stop control Rotary control Heat safety features Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Guarantee period Approvals EAB ELECTRICAL SAME ELECTRICAL SAME Approvals Power on Marking (LIVD; EMC) BEAB European Water Label		
Maximum pressure Recommended Maximum pressure 3 bar Water entry points Bottom and rear right only Inlet fitting connections 1/2" BSP thread Electrical requirements Supply voltage 230 - 240V, MCB rating 40AMP Water system Mains cold Intuitive single dial Illuminated touch start/stop control Rotary control Rotary control Heat safety features Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Shower unit - 2 years Shower head and kit - 2 years Approvals	Power	9.5kW
Recommended Maximum pressure 3 bar Water entry points Bottom and rear right only Inlet fitting connections 1/2" BSP thread Electrical requirements Supply voltage 230 - 240V, MCB rating 40AMP Water system Mains cold Intuitive single dial Illuminated touch start/stop control Rotary control Heat safety features Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Shower unit - 2 years Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB	Minimum pressure	0.9 bar (@8lpm)
Water entry points Bottom and rear right only Inlet fitting connections 15mm compression Outlet fitting connections 11/2" BSP thread Electrical requirements Supply voltage 230 - 240V, MCB rating 40AMP Water system Mains cold Intuitive single dial Illuminated touch start/stop control Rotary control Heat safety features Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Shower unit - 2 years Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB	Maximum pressure	10 bar
Cable entry points Inlet fitting connections I5mm compression Outlet fitting connections I1/2" BSP thread Supply voltage 230 - 240V, MCB rating 40AMP Water system Mains cold Intuitive single dial Illuminated touch start/stop control Rotary control Heat safety features Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Shower unit - 2 years Shower head and kit - 2 years Approvals Approvals	Recommended Maximum pressure	3 bar
Inlet fitting connections Outlet fitting connections 1/2" BSP thread Electrical requirements Supply voltage 230 - 240V, MCB rating 40AMP Water system Mains cold Intuitive single dial Illuminated touch start/stop control Rotary control Heat safety features Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Shower unit - 2 years Shower head and kit - 2 years Approvals Approvals	Water entry points	Bottom and rear right only
Outlet fitting connections Electrical requirements Supply voltage 230 - 240V, MCB rating 40AMP Water system Mains cold Intuitive single dial Illuminated touch start/stop control Rotary control Heat safety features Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Shower unit - 2 years Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB	Cable entry points	Bottom and rear right only
Electrical requirements Supply voltage 230 - 240V, MCB rating 40AMP Mains cold Intuitive single dial Illuminated touch start/stop control Rotary control Heat safety features Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Shower unit - 2 years Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB	Inlet fitting connections	15mm compression
Water system Mains cold Intuitive single dial Illuminated touch start/stop control Rotary control Heat safety features Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Shower unit - 2 years Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB	Outlet fitting connections	1/2" BSP thread
Intuitive single dial Illuminated touch start/stop control Rotary control Heat safety features Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Shower unit - 2 years Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB	Electrical requirements	Supply voltage 230 - 240V, MCB rating 40AMP
Features Illuminated touch start/stop control	Water system	Mains cold
Rotary control Heat safety features Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Shower unit - 2 years Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB Approvals	Features	Intuitive single dial
Features Heat safety features Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Shower unit - 2 years Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB Approvals		Illuminated touch start/stop control
Power on indication Illuminated panel 105mm, 5 spray patterns Colour Chrome Shower unit - 2 years Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB		Rotary control
Illuminated panel		Heat safety features
Colour Chrome Guarantee period Shower unit - 2 years Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB		Power on indication
Colour Chrome Shower unit - 2 years Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB Approvals		Illuminated panel
Guarantee period Shower unit - 2 years Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB Approvals		105mm, 5 spray patterns
Guarantee period Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB Approvals	Colour	Chrome
Shower head and kit - 2 years CE Marking (LVD; EMC) BEAB Approvals	Guarantee period	Shower unit - 2 years
BEAB Approvals		Shower head and kit - 2 years
Approvals	Approvals	CE Marking (LVD; EMC)
		BEAB
		European Water Label
ERP Directive		ERP Directive

 $The company \ reserves \ the \ right to \ alter, \ change \ or \ modify \ the \ product \ or \ product \ specifications \ without \ prior \ warning.$ Please refer to the installation guides for technical information.