


Single Window Flashings

Keylite Flashing Kits are the most efficient way to ensure a watertight installation for your windows and have been designed to integrate efficiently with specific roofing materials.

Slate Flashing Components

Slate: SRF

- ▶ Roof Pitch 15° 90°
- Material Profile Max 10mm Flashing for single window installation into slate up to 10mm thick. Not to be used with interlocking slate.

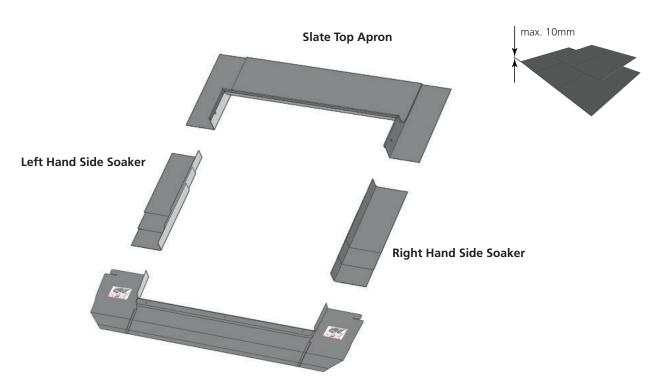

Slate Bottom Apron

One-piece bottom apron

The unique one-piece bottom apron design improves aesthetic finish and allows for easy installation.

Guarantee

▶ **10 Years** - Keylite's hassle free guarantee Flashings.

Finish Options

- Grey
- ► Conservation Black (CW)

UK

Unit 3 Gateway Road, Burton Gateway, Burton upon Trent, DE13 8FL

T: +44 (0) 1283 200 158 E: info@keyliteuk.com

NI & ROI

Derryloran Industrial Est. Sandholes Road, Cookstown, Co. Tyrone, BT80 9LU

T: +44 (0) 28 8675 8921 E: info@keylite.co.uk