


N 70, Wall-mounted cooker hood, 90 cm, Stainless steel
D95BMP5N0B



A

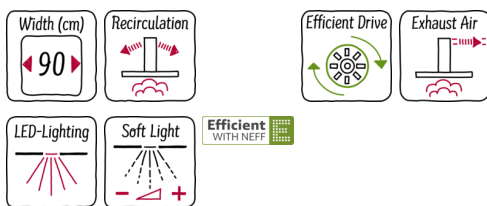

The coordinating and stylish Neff box hood is modern in design and keeps up with your cooking.

- ✓ High extraction rate: Ensures a clear view while cooking thanks to efficient motor technology as either a ducted or recirculating solution.
- ✓ Special noise insulation: guarantees an extremely quiet cooking experience
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a finger
- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 46
 Minimum distance above an electric hob : 550
 Minimum distance above a gas hob : 650
 Net weight (kg) : 20.213
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 427
 Boost position output recirculating (m³/h) : 378
 Maximum output recirculating air (m³/h) : 324
 Boost position air extraction (m³/h) : 702
 Number of lights (Stck) : 3
 Noise level (dB(A) re 1 pW) : 55
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable stainless steel
 EAN code : 4242004234913
 Connection rating (W) : 145
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : GB plug
 Installation type : Wall-mounted

Optional accessories

| | |
|-----------|--|
| Z50XP0X0 | CleanAir act.carbon filter regenerative |
| Z5102X1 | Active carbon filter |
| Z5102X5 | Recirculating kit |
| Z5170X1 | CleanAir active carbon filter spare part |
| Z51FXI0X5 | Integrated CleanAir Recirculation Kit |
| Z51FXJ0X5 | Integrated CleanAir Recirculation Kit |
| Z5276X0 | CleanAir Recirculation Kit |
| Z5861N0 | Back panel stainless steel |
| Z5895N0 | Stainless steel back panel |
| Z5906N1 | Chimney extension 1000 mm |
| Z5916N1 | Chimney extension 1500 mm |



4 242004 234913

N 70, Wall-mounted cooker hood, 90 cm, Stainless steel
D95BMP5NOB

Features

Key performance features:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 427 m³/h
Intensive 702 m³/h
- Noise max. Normal Level: 55 dB*

Features

- Touch control
- 3 power levels and 2 intensive settings
- 3 x 1.5w LED Light
- softLight with dimmer function
- Efficient BLDC-technology
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- 3 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- Noise reduction function
- Additional noise insulation
- easy to clean Inner frame

Design

- Stainless steel
- Box design
- Chimney hood
- For wall mounted installation
- Touch control
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 427 m³/h
Intensive 702 m³/h
- Extraction rate according to EN 61591 max. 427 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
Intensive: 66 dB(A) re 1 pW (53 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 55 dB (A) re 1pW
- Noise max. Normal Level: 55 dB*
- Power rating: 145 W
- Light Intensity: 359 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 628-954 x 898 x 500 mm
- Dimensions recirculating (HxWxD): 628-1064 x 898 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD): 809-1139 x 898 x 500 mm
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 33.6 kWh/year*

* In accordance with the EU-Regulation No 65/2014

N 70, Wall-mounted cooker hood, 90 cm, Stainless steel
D95BMP5N0B

Dimensioned drawings

