

AQUALISA


LUMI™

ELECTRIC SHOWER


LME8501

8.5KW WITH ADJUSTABLE HEAD - CHROME

DIMENSIONAL DRAWINGS

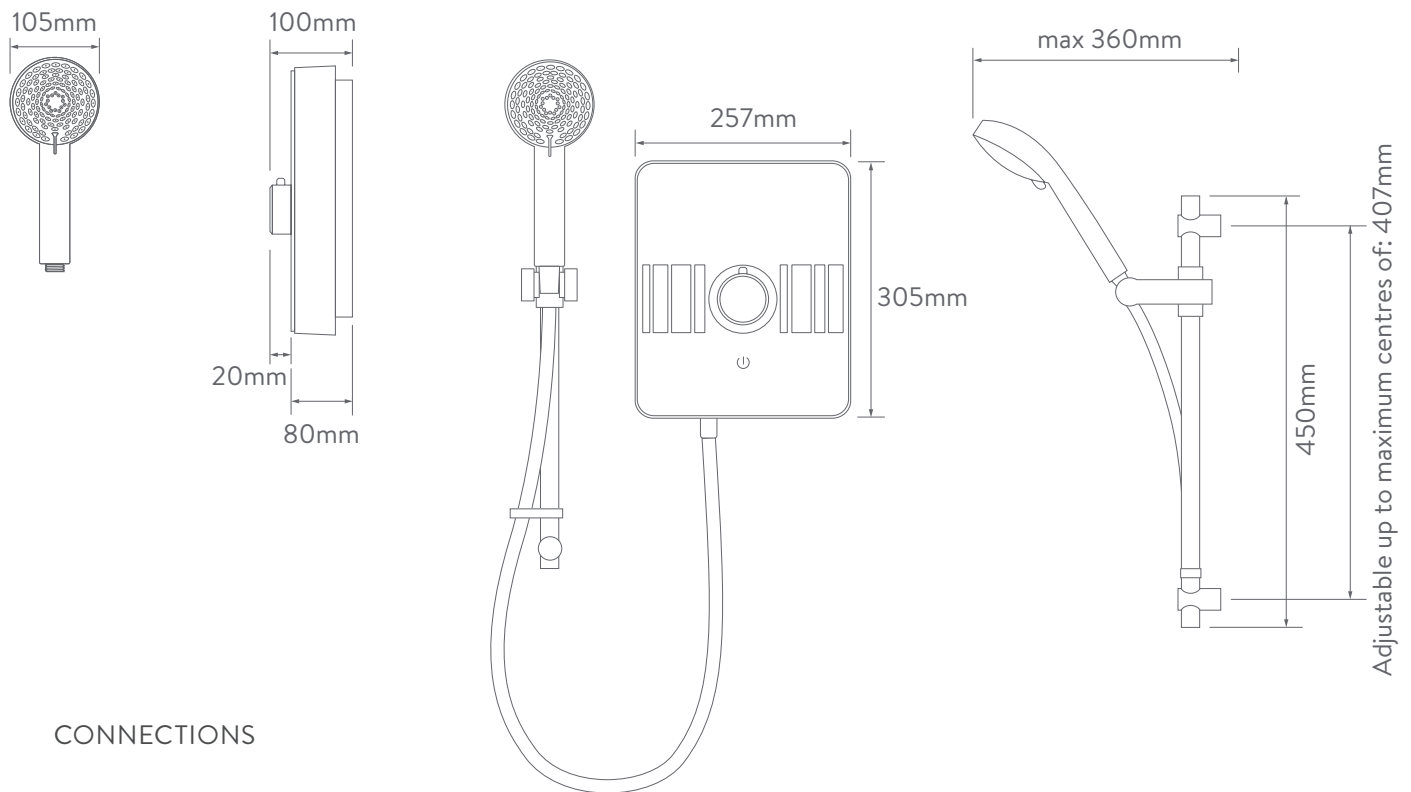

CONNECTIONS

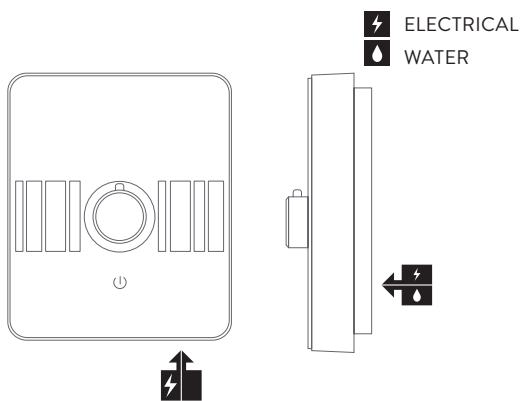

AQUALISA

LUMI™

ELECTRIC SHOWER

LME8501

8.5KW WITH ADJUSTABLE HEAD - CHROME

TECHNICAL SPECIFICATIONS

| | |
|------------------------------|---|
| Power | 8.5kW |
| Minimum pressure | 0.9 bar (@8lpm) |
| Maximum pressure | 10 bar |
| Recommended Maximum pressure | 3 bar |
| Water entry points | Bottom and rear right only |
| Cable entry points | Bottom and rear right only |
| Inlet fitting connections | 15mm compression |
| Outlet fitting connections | 1/2" BSP thread |
| Electrical requirements | Supply voltage 230 - 240V, MCB rating 40AMP |
| Water system | Mains cold |
| Features | Intuitive single dial |
| | Illuminated touch start/stop control |
| | Rotary control |
| | Heat safety features |
| | Power on indication |
| | Illuminated panel |
| | 105mm, 5 spray patterns |
| Colour | Chrome |
| Guarantee period | Shower unit - 2 years |
| | Shower head and kit - 2 years |
| Approvals | CE Marking (LVD; EMC) |
| | BEAB |
| | European Water Label |
| | ERP Directive |

The company reserves the right to alter, change or modify the product or product specifications without prior warning. Please refer to the installation guides for technical information.