



ONDULINE EASYLINE®

LEISURE HOUSING

Made by me!



GARDEN SHED


ONDULINE EASYLINE®

ONDULINE EASYLINE®

Made by me!



Before



After

TOOL SHELTER



PLAYGROUND



Easy to install



Onduline® Sealsmart™



Watertight



Eco-responsible



Lightweight

**EASY TO CARRY,
EASY TO HANDLE,
EASY TO INSTALL.**

ONDULINE EASYLINE® is a flexible and handy material, suitable to ensure an easy and longlasting solution for your roof.

Onduline® material does not contain any asbestos, and never had. Onduline® material does not contain any metal, it will never rust!

More than 50% of our material made with recycled content



Made in Europe



Norm EN 534



Recycled Content Verified by ICCI

See ICCI® SAVE VAR - 1016



Protection above all

Sustainable product & production because we care about environment!

ONDULINE BUILDING PRODUCTS LTD
Dawson House, 5 Jewry Street
London, EC3N 2EX
onduline.co.uk




Onduline French joint stock company
share capital of €11,323,485.05
RCS Nanterre 552 088 361

Onduline®
Lightweight roofing systems


Onduline®
Lightweight roofing systems

Made by me!

8303205A - 12/2018 - Not contractually binding. All information given is for illustrative purposes only and may be modified without notice.

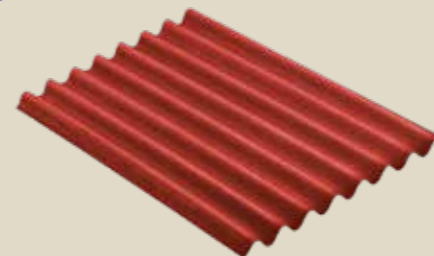


Choice of colors

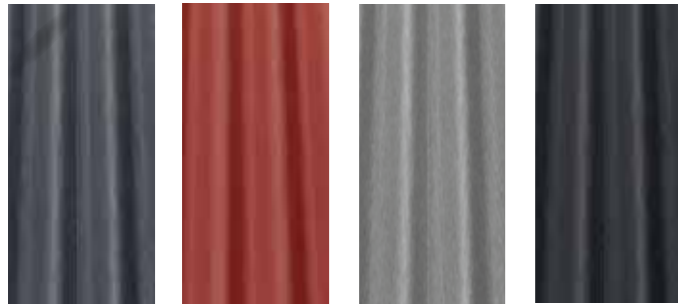

Intense Anthracite Grey Intense Red Intense Grey Intense Black

Technical characteristics

Length	100 cm
Width	76 cm
Thickness	2,6 mm
Corrugation height	38 mm
Weight per sheet	2,5 kg
Surface	0,76 m ²
Carbon footprint	4 kg eq CO ₂ /m ²

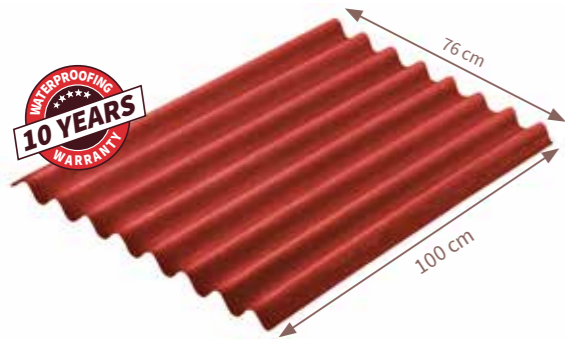

Onduline 10 years warranty for waterproofing, valid if the product has been installed with Onduline recommended accessories (Ridge, Verge, Fasteners) and in full compliance with installation recommendations (more on onduline.com).

Installation in few and easy steps

1 Laying in staggered rows avoids the superposition of 4 sheet thicknesses at overlap points. Always start your first row below the gutter, leaving maximum 7 cm overhang. Begin the second row with half an ONDULINE EASYLINE® sheet (cut lengthwise) and carry on with complete sheets.

2 Sheets must be fixed onto each of their supporting battens. Every corrugation should be nailed at eaves, overlaps and ridges. Every second corrugation has to be fixed at the intermediate purlins. The fixing at the intermediate purlins has to be staggered.

3 The ridge element has to overlap the ONDULINE EASYLINE® sheet min 12 cm.

The ridge elements are fixed in opposite direction to the prevailing winds.

Maintain regularly your roof for a better durability: remove vegetation and leaf debris, take care of evacuations, accessories and structure, and maintain continuous ventilation.

4 Roof support
Battens rules. The roof pitch and occasional load (especially wind and snow) determine the distance between the battens. **The maximum distance is in any case 43 cm.**

Roof pitches	Maximum battens distance
>9 %	>27 %

Boarding only (Recommended) 26,7 cm

Minimum end overlap


30 cm 20 cm

Minimum side overlap

2 corrugations 1 corrugation

Effective sheet coverage
0,47 m ² 0,53 m ²

CALCULATE THE PITCH OF YOUR ROOF


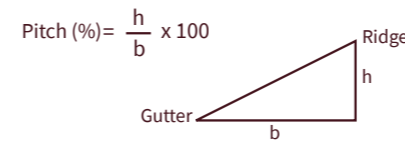


Minimum pitch required: 9%



Watch the video!

Accessories

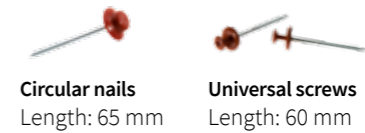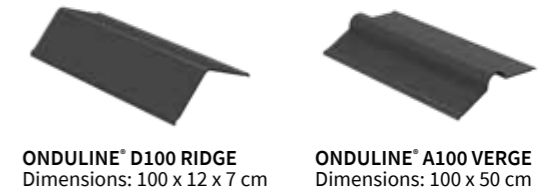

Minimum 15 fasteners/m²

Made by me!

How to cut and trim your product?

You can easily cut the sheets with roofers cutter, or with hand or mechanical saw.

