


Safety & Care

1. Always take care when using power tools, particularly if there is any water in the working area.
2. When drilling into a tiled surface do not use a hammer drill.
3. Always use a drill bit that is suitable for the surface that is being drilled.
4. The wall plugs supplied are for use on solid walls only. For cavity walls or plasterboard use specialist fixings that are suitable for the type of wall construction.
5. To retain the best quality finish, clean product regularly with a soft damp cloth.
6. Do not use abrasive or chemical cleaners, as these may damage the product.
7. Redecoration may be required on some painted surfaces after removal.
8. The maximum safe working load for the shelf is 5kg distributed evenly.
9. Do not position glass products directly above a heat source.

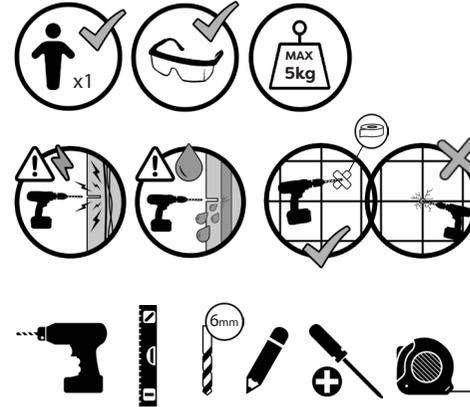

CONTACT DETAILS


Croydex
Central Way
Andover
Hampshire
SP10 5AW
UK

Tel: +44 (0)1264 365881
Email: info@croydex.co.uk


www.croydex.com

Follow these instructions when using existing holes.


1 Unscrew your old wall mounted accessory ensuring you do not damage the holes in the wall. New wall plugs may be required.

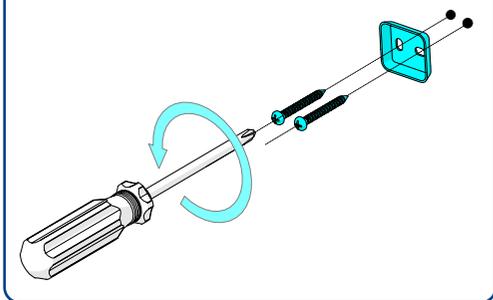


2 Screw the X plate into the existing screw holes. The X plate can fit maximum hole centres of 34mm and minimum hole centres of 15mm.

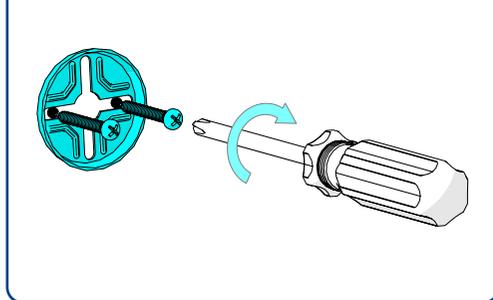

3 If you are installing a glass shelf or a towel rail you can adjust your brackets along the product to suit the bracket centres.

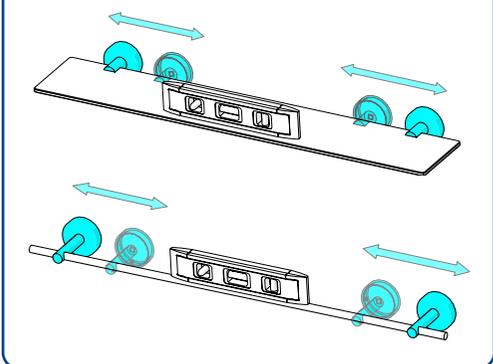


4 Tighten the grub screws to secure your product to the wall bracket.

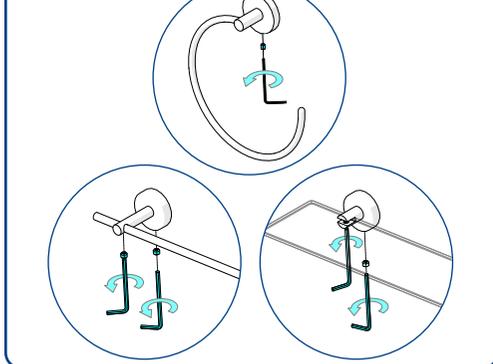


Follow these instructions when drilling new holes.


1 If you are installing a glass shelf or a towel rail attach the brackets and measure the distance between them.

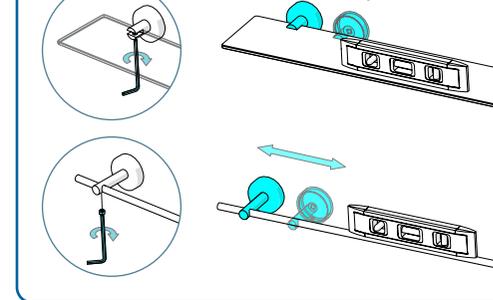

2 Place the X plate in the desired location and mark where you would like to drill. The wall plate can fit maximum hole centres of 34mm and minimum hole centres of 15mm.

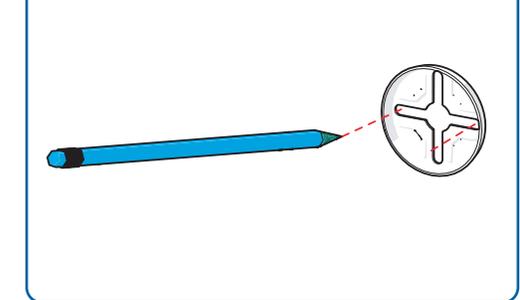

3 Drill the marked screw holes (A), then insert the wall plugs (B) and screw the X plate into place (C).

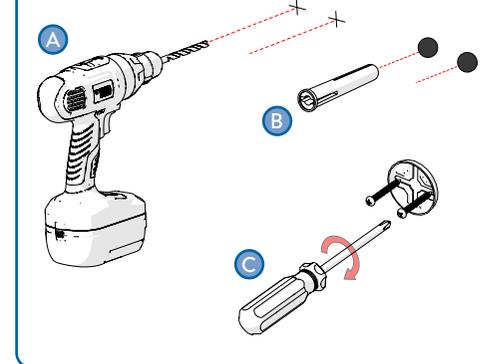

4 Tighten the grub screws to secure your product to the wall bracket.

