

EXTERIOR LED WALL LIGHT


Product Features

- Exterior single and twin wall lights with adjustable LED heads
- Die-cast aluminium housing for increased durability
- Suitable for use and ambient, decorative or security lighting
- PIR option available for twin head version



CAT NO.	TYPE	LUMINAIRE LUMENS	WATTAGE
LEXWS4B40	Single Head	360	5W
LEXWT7B40	Twin Head	720	10W
LEXWT7B40P	Twin Head PIR	720	10W

Product Drawing

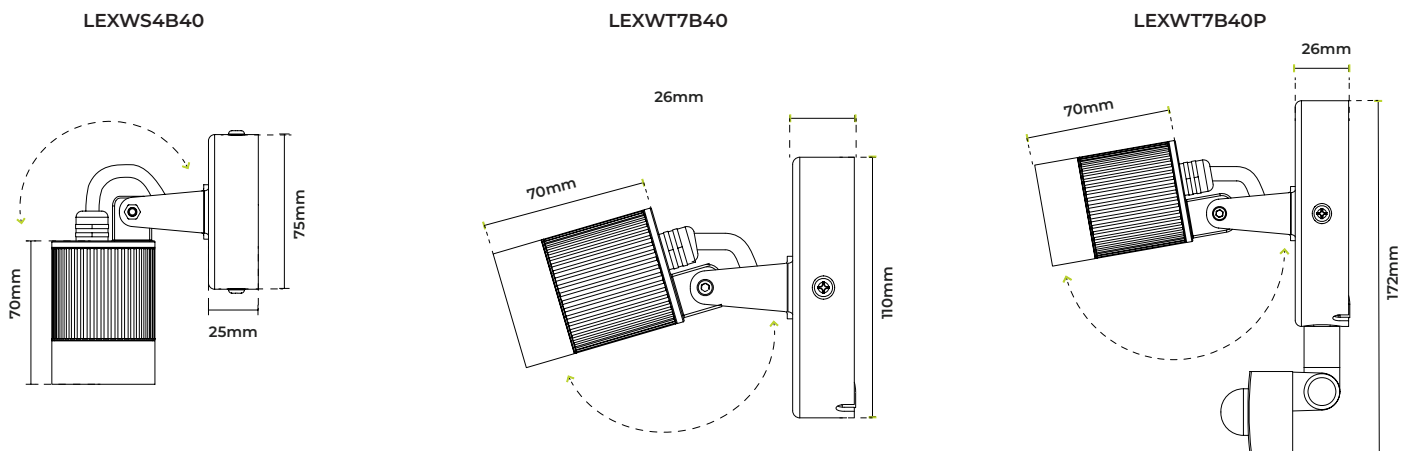

CAT NO.	WEIGHT (kg)	EFFICACY (Lm/cW)	CRI	FREQUENCY (Hz)	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
LEXWS4B40	0.4	72	>80	50-60	IK04	0 to +25	25	L70/B50
LEXWT7B40	0.77	72	>80	50-60	IK04	0 to +25	25	L70/B50
LEXWT7B40P	0.8	72	>80	50-60	IK04	0 to +25	25	L70/B50

STANDARD	DESCRIPTION
EN 60598-1	Luminaire – General requirements
EN 60598-2-1	Luminaire – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

LUCECO

This luminaire contains built-in LED lamps.

A⁺⁺
A⁺
A
B
C
D
E

}

LED

The lamps cannot be changed in the luminaire.

874/2012

