



  
**Made**  
*by me!*

**ONDUVILLA®**

THE MOST AESTHETICAL  
ROOFING SOLUTION  
**WITH A REAL LOOK  
OF CLAY TILE.**



**Onduline®**

Get the **roof** done - and done well

**ONDUVILLA®**




**Let our  
solutions  
inspire you!**

With **ONDUVILLA® tiles**, you can cover your auxiliary building roof all by yourself, in a practical and long lasting way.

Onduline® material does not contain any asbestos, and never had. Onduline® material does not contain any metal, it will never rust!

# ONDUVILLA®

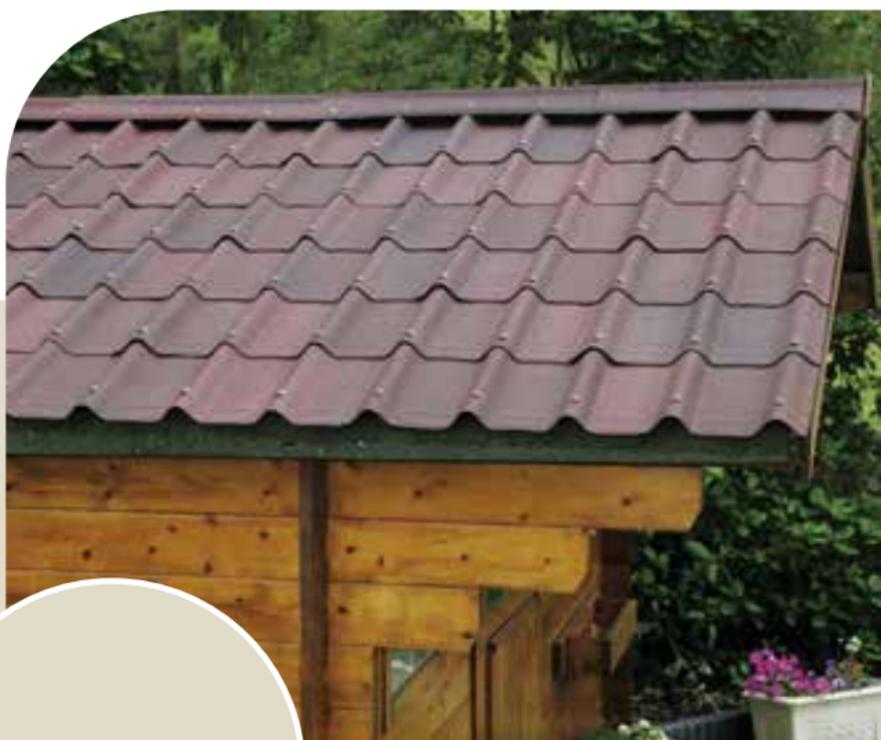

**ONDUVILLA®** is a unique roofing solution with a very aesthetic traditional clay tiles look. Perfectly waterproof, **ONDUVILLA®** is light and provides a very elegant appearance to all types of roofs. **ONDUVILLA®** can cover new roofs or be used to renovate an existing roof.



**Compact solution**



**Aesthetic**



**Sealsmart Technology**



**50% recycled content<sup>(1)</sup>**



Onduline 15 years warranty for waterproofing is valid if the product has been installed with Onduline recommended accessories (Ridge, Verge, Fasteners) and in full compliance with installation recommendations (more on [onduline.com](https://www.onduline.com)).

(1) ICC-ES VAR Environmental Report VAR-1016 - independent third party official report

## A LARGE CHOICE OF COLOURS

### I MATTE COLOURS



**Shaded  
Red**



**Shaded  
Green**



**Shaded  
Brown**



**Anthracite  
Black**

## TECHNICAL CHARACTERISTICS


LENGTH	<b>0,40 m</b> [-0.1 ; +0.4 cm]
WIDTH	<b>1,07 m</b> [± 2.5 cm]
SURFACE	<b>0,43 m<sup>2</sup></b>
THICKNESS	<b>3,00 mm</b> [-10 % ; +10 %]
CORRUGATION HEIGHT	<b>38 mm</b> [± 2 mm]
WEIGHT	<b>1,3 kg</b> [± 0.1 kg]
WEIGHT PER m <sup>2</sup>	<b>3,0 kg/m<sup>2</sup></b> [-10 % ; +10 %]



  
**Made**  
by me!

**Be proud  
of the work  
done!**


## INSTALLATION IN FEW AND EASY STEPS

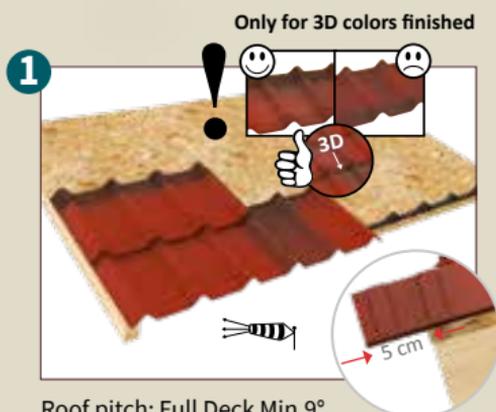

Start the installation in a direction opposite prevailing winds. Start the fixing from the eave. The overhang has to be max 5 cm. To prevent the penetration of wind driven rain, snow and birds fix ONDUVILLA® foam fillers.




Stagger the rows, by starting the second row with a half tile. Ensure proper waterproofing by aligning the overlapping guides.

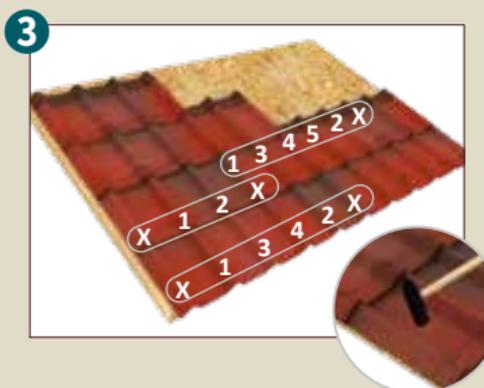

The fixing on each corrugation should be done in the right order and in between the 2 overlapping guides. Do not fix those corrugations that will be overlapped by the next tile or verge piece.




Optimize aesthetic, waterproofing, and wind uplift resistance by using a verge element. Fix it first into the sidewall, then on the top of the corrugation.

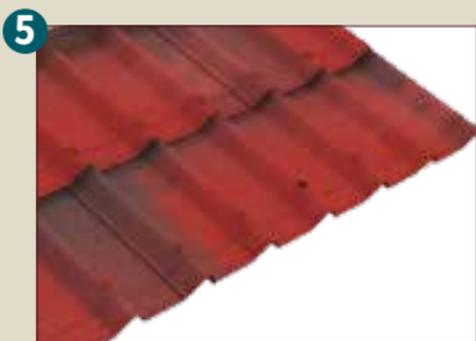

If the opposite end the roof doesn't finish with a corrugation, cut the last tile at the edge of the roof and use a batten as a support for the corrugation. Bend the last tile over the batten, in order to ensure proper waterproofing.



Use a ridge batten to support the Onduline ridge piece as shown. The ridge element has to overlap the ONDULINE® sheet minimum 12 cm.

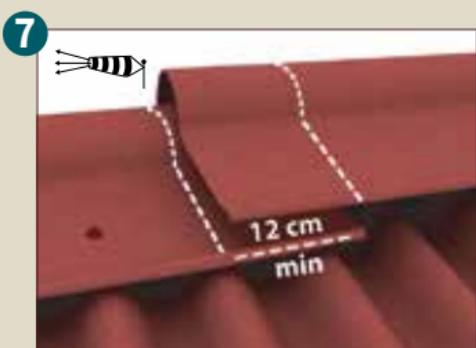

The ridge elements are fixed in opposite direction to the prevailing winds.

### How to cut and trim your product?



You can easily cut the sheets with roofers cutter, or with hand or mechanical saw.

### FOR MORE INFORMATION



Watch the installation video!

## ROOFING SYSTEM

▶ ONDUVILLA®  
D100 VERGE



▶ ONDUVILLA®  
A100 RIDGE



▶ ONDULINE®  
FOAM FILLER

▶ ONDULINE®  
UNIVERSAL  
SCREW



▶ ONDULINE®  
MONOBLOC  
NAIL



Minimum 17 fasteners/m<sup>2</sup>

## COMPLEMENTARY ACCESSORIES



▶ ONDUTISS® AIR



▶ ONDULINE® EAVES  
VENTILATOR STRIP



Fully compliant  
with regulations



Made of 50%  
recycled content



### Onduline Building Products Ltd

The Whitechapel Building  
10 Whitechapel High Street  
London  
E1 8QS  
T. +44 (0)207 7270533  
E. [enquiries@onduline.net](mailto:enquiries@onduline.net)

[onduline.co.uk](https://onduline.co.uk)



Onduline  
French joint stock company  
share capital of €11,323,485.05  
RCS Nanterre 552 088 361

Onduline reserves the right to amend product specifications without prior notice. Product thicknesses shown in this document should not be taken as being available ex-stock and reference should be made to the current Onduline price-list or advice sought from Onduline Customer Service Department. The information, technical details and fixing instructions etc. included in this literature are given in good faith and apply to uses described. Recommendations for use should be verified for suitability and compliance with actual requirements, specifications and any applicable laws and regulations. For other applications or conditions of use, Onduline offers a Technical Advisory Service, the advice of which should be sought for uses of Onduline products that are not specifically described herein. To ensure you are viewing the most recent and accurate product information, please scan the QR code directly above.

**Onduline®**  
Get the **roof** done - and done well

