

Product Finish: Brushed Brass

Product code: AT2182  
EAN13 barcode: 5060879990210



**Product features:**


- Metal construction throughout
- Supplied complete with flexible tail pipes for fast simple fitting
- Minimalist planate design form
- Quarter turn handle action for precise flow control
- Antisplash spout supplied as standard

**Additional information / Parts included:**

Includes triangular stabilising bracket, 2.0 & 2.5mm A/F Allen key & high flow aerator

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

**Product dimensions:**

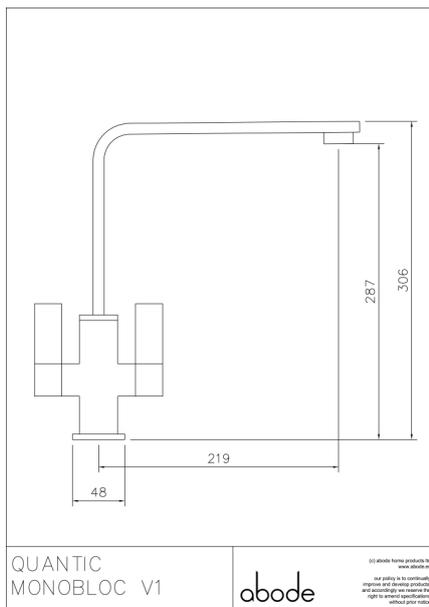

- Overall Height / projection: 306 mm
- Exit reach: 219 mm
- Exit height: 287 mm
- Centre distance(s):


- Base diameter(s): 48 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 45 mm

- Spout diameter: 30 x 10 mm
- Spout aerator size: M24

**Packaged properties:**

- Box length: 445mm
- Box depth: 70mm
- Box width: 335mm
- Units per outer: 5
- Tap only weight: 1.30kg
- Boxed weight: 1.74kg

**Product flow characteristics:**

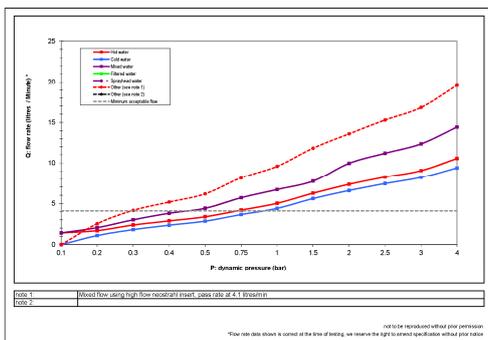

- Min / Max water pressure: 0.30 / 5.50 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 12.36

- Control valve type: M20 ceramic disc, quarter turn operation
- Product flow characteristics: Single flow
- Non return valve(s): Cold only

- Aerator type: Honeycomb aerator & hi-flow neostrahl
- Accepts revolve / spray areator: No
- Spout connection method: Grub screw

- Tail pipe inlet / outlet size: M10 / 1/2" Male (Hot), 1/2" Female (Cold)
- Inlet pipe type / length: flexible stainless braided hose / 365/370 mm

**Care instructions summary:**

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

**Warranty Summary (Full details available on request):**

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year