


N 70, Gas hob, 75 cm, Tempered glass
T27CS59S0



COOKING PASSION SINCE 1877

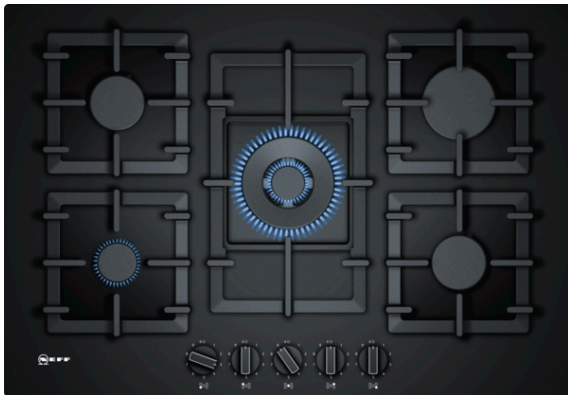

The gas hob with a tempered glass surface and adjustable FlameSelect.

- ✓ Tempered Glass Surface - extremely easy-to-clean surface.
- ✓ FlameSelect® - Gain ultimate control of your flame.
- ✓ Pan Supports - continuous cast-iron pan supports for maximum stability and cooking convenience.
- ✓ Wok Burner - powerful cooking at up to 4 kW.
- ✓ Sword Knobs - a better feel and easier to operate, the new knob in an attractive design.

Features

Technical Data

Product name/family : gas hob w integrated controls
 Construction type : Built-in
 Energy input : Gas
 Total number of positions that can be used at the same time : 5
 Type of control setting devices : sword knobs
 Required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm
 Width of the appliance : 752 mm
 Dimensions : 45 x 752 x 520 mm
 Dimensions of the packed product (HxWxD) : 145 x 793 x 597 mm
 Net weight : 19.8 kg
 Gross weight : 21.3 kg
 Residual heat indicator : without
 Location of control panel : Hob front
 Basic surface material : Tempered glass
 Color of surface : Black
 Color of frame : Black
 Approval certificates : CE, Eurasian
 Length of electrical supply cord : 100 cm
 Knob Material : Plastic
 Sealed Burners : No
 Connection rating : 1 W
 Gas connection rating : 11500 W
 Fuse protection : 3 A
 Voltage : 220-240 V
 Frequency : 60; 50 Hz
 Main colour of product : Black
 Energy input : Gas
 Gas type : Nat gas H/E/(L) 20 (25) mbar
 Alternative gas type : Liquid gas G30,31 28-30/37mbar
 Approval certificates : CE, Eurasian
 Plug type : no plug
 Appliance Dimensions (h x w x d) (in) : + x x
 Dimensions of the packed product : 5.70 x 23.50 x 31.22
 Net weight : 44.000 lbs
 Gross weight : 47.000 lbs
 Total number of positions that can be used at the same time : 5
 Length of electrical supply cord : 100 cm
 Required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm
 Dimensions : 45 x 752 x 520 mm
 Dimensions of the packed product (HxWxD) : 145 x 793 x 597 mm
 Net weight : 19.8 kg
 Gross weight : 21.3 kg

Optional accessories

Z2402X0
 Z2471X0 Wok ring
 Z2480X0



Features

Design

- tempered glass surface, black
- Two built-in options:
 - Flush installation
 - Surface mounted installation: install the hob either flush or slightly raised on the worktop
- Cast iron pan supports with rubber feet

Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner hob
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: Wok burner up to 4 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
NG H/E 20mbar, E+ 20/25mbar
Natural gas H 25 mbar (HU)
Natural gas L 25 mbar (NL)
Liquid gas G30,31 28-30/37mbar
Liquid gas G30 37 mbar (PL)
Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 58 x 752 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 11.5 KW

Dimensioned drawings

