


N 70, Gas hob, 60 cm, Tempered glass
T26CS49S0



COOKING PASSION SINCE 1877

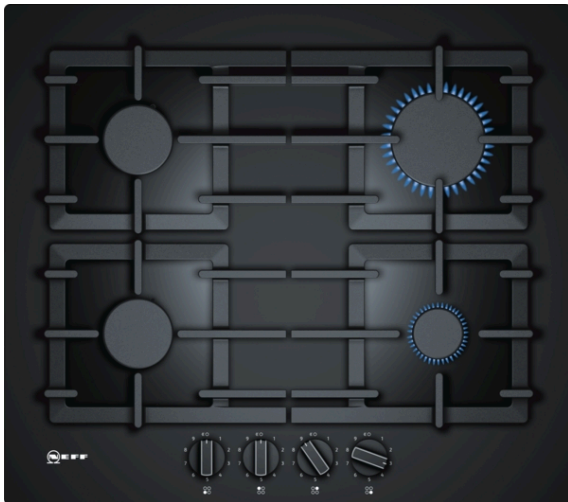

The gas hob with a tempered glass surface and adjustable FlameSelect.

- ✓ Tempered Glass Surface - extremely easy-to-clean surface.
- ✓ FlameSelect® – Gain ultimate control of your flame.
- ✓ Pan Supports - continuous cast-iron pan supports for maximum stability and cooking convenience.
- ✓ Sword Knobs - a better feel and easier to operate, the new knob in an attractive design.
- ✓ Installation - you have the option of installing the gas hob either flush or slightly raised.

Features

Technical Data

Product name/family : gas hob w integrated controls
Construction type : Built-in
Energy input : Gas
Total number of positions that can be used at the same time : 4
Type of control setting devices : sword knobs
Required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm
Width of the appliance : 590 mm
Dimensions : 45 x 590 x 520 mm
Dimensions of the packed product (HxWxD) : 141 x 651 x 578 mm
Net weight : 15.1 kg
Gross weight : 16.0 kg
Residual heat indicator : without
Location of control panel : Hob front
Basic surface material : Tempered glass
Color of surface : Black
Color of frame : Black
Approval certificates : CE, Eurasian
Length of electrical supply cord : 100 cm
Knob Material : Plastic
Sealed Burners : No
Connection rating : 1 W
Gas connection rating : 7500 W
Fuse protection : 3 A
Voltage : 220-240 V
Frequency : 60; 50 Hz
Main colour of product : Black
Energy input : Gas
Gas type : Nat gas H/E/(L) 20 (25) mbar
Alternative gas type : Liquid gas G30,31 28-30/37mbar
Approval certificates : CE, Eurasian
Plug type : no plug
Appliance Dimensions (h x w x d) (in) : + x x
Dimensions of the packed product : 5.55 x 22.75 x 25.62
Net weight : 33.000 lbs
Gross weight : 35.000 lbs
Total number of positions that can be used at the same time : 4
Length of electrical supply cord : 100 cm
Required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm
Dimensions : 45 x 590 x 520 mm
Dimensions of the packed product (HxWxD) : 141 x 651 x 578 mm
Net weight : 15.1 kg
Gross weight : 16.0 kg

Optional accessories

Z2402X0
Z2480X0



Features

Design

- tempered glass surface, black
- Two built-in options:
 - Flush installation
 - Surface mounted installation: install the hob either flush or slightly raised on the worktop
- Cast iron pan supports with rubber feet

Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 4 burner hob
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
NG H/E 20mbar, E+ 20/25mbar
Natural gas H 25 mbar (HU)
Natural gas L 25 mbar (NL)
Liquid gas G30,31 28-30/37mbar
Liquid gas G30 37 mbar (PL)
Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 58 x 590 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 7.5 KW

Dimensioned drawings

