A2415 Flush Valve Installation Instructions

ASAFA24150000A

Version 1.4

Work preparation: Remove the inoperative tank fittings and carefully clean the water cistern/tank.

Make sure all debris has been removed prior to installing new tank fittings.

Two piece flush valve installation

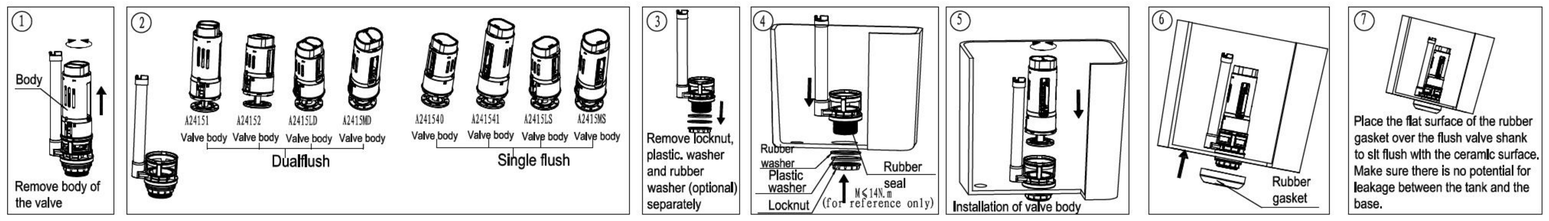

One piece flush valve installation

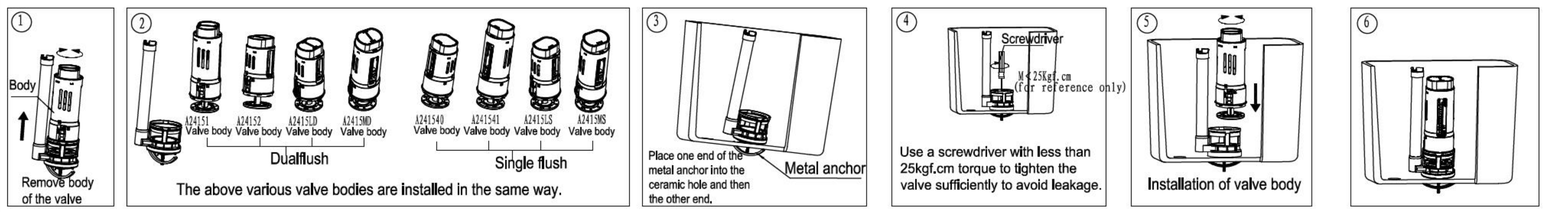

The installation and adjustment of single push button

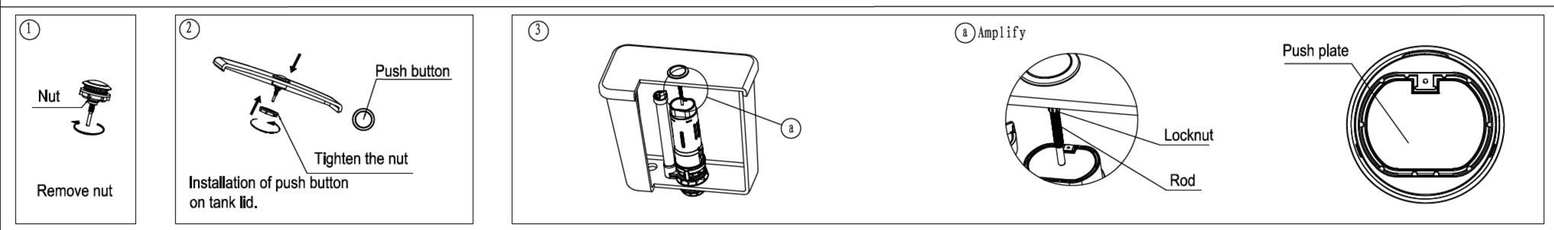

The installation and adjustment of dual push button

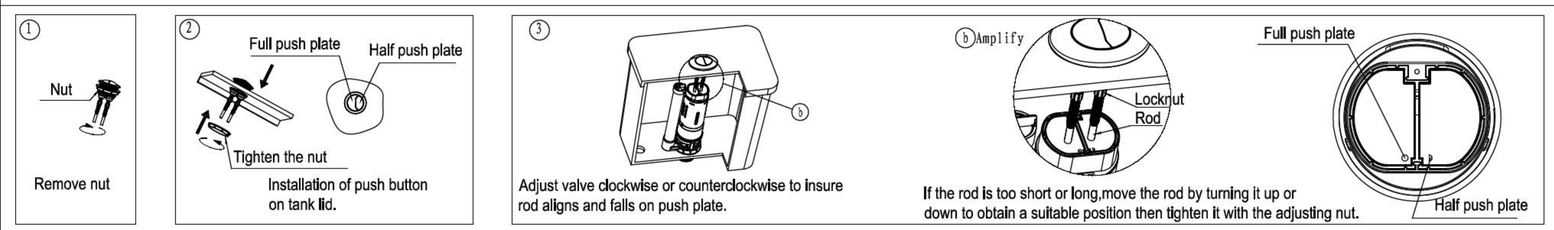

Installation of push button with "U"lock

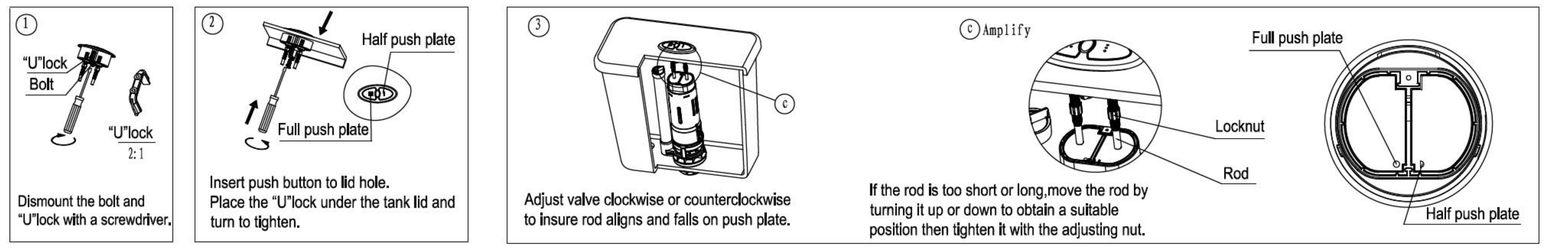

Refill tube installation and adjustment of flush volume

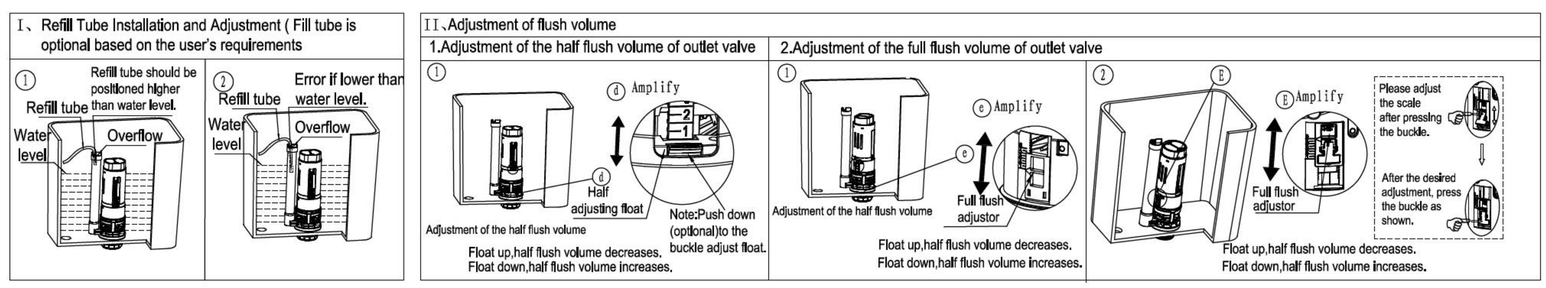

Troubleshooting

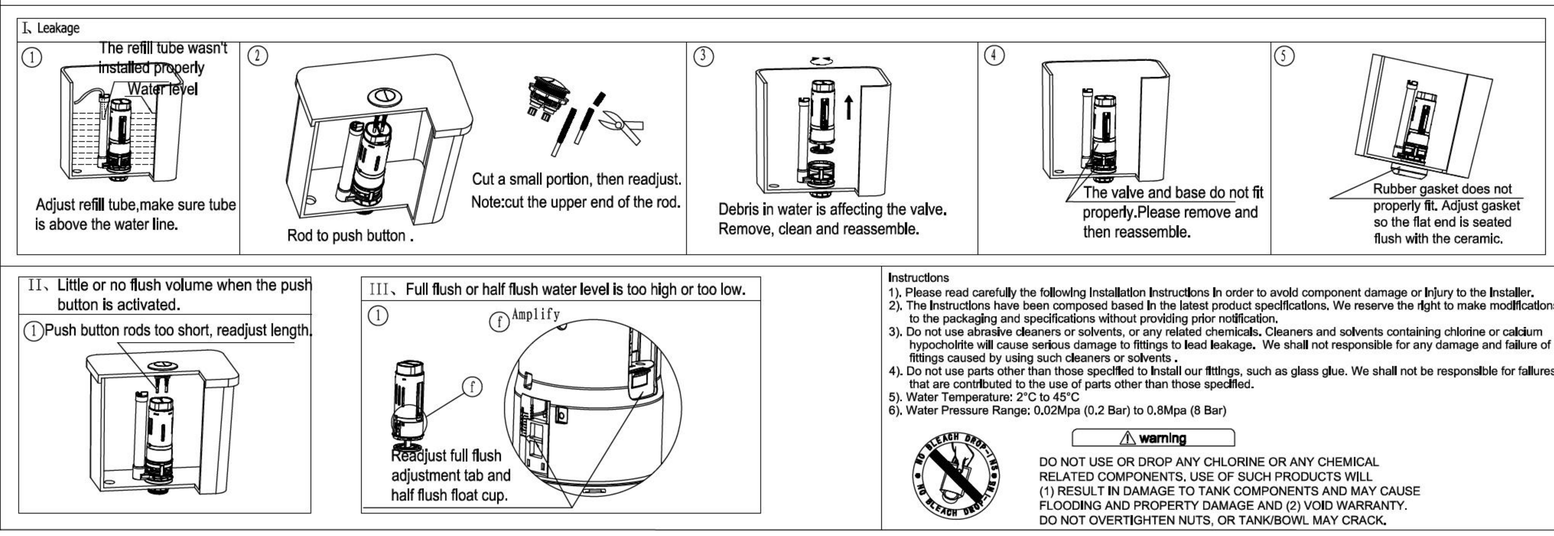

Instructions

1). Please read carefully the following Installation Instructions in order to avoid component damage or injury to the Installer.
2). The Instructions have been composed based in the latest product specifications. We reserve the right to make modifications to the packaging and specifications without providing prior notification.
3). Do not use abrasive cleaners or solvents, or any related chemicals. Cleaners and solvents containing chlorine or calcium hypocholrite will cause serious damage to fittings to lead leakage. We shall not responsible for any damage and failure of fittings caused by using such cleaners or solvents .
4). Do not use parts other than those specified to install our fittings, such as glass glue. We shall not be responsible for failures that are contributed to the use of parts other than those specified.
5). Water Temperature: 2°C to 45°C
6). Water Pressure Range: 0.02Mpa (0.2 Bar) to 0.8Mpa (8 Bar)

⚠ warning

DO NOT USE OR DROP ANY CHLORINE OR ANY CHEMICAL RELATED COMPONENTS. USE OF SUCH PRODUCTS WILL (1) RESULT IN DAMAGE TO TANK COMPONENTS AND MAY CAUSE FLOODING AND PROPERTY DAMAGE AND (2) VOID WARRANTY. DO NOT OVERTIGHTEN NUTS, OR TANK/BOWL MAY CRACK.

Thank you for choosing our product. You may contact our local dealer directly for prompt service if you have any questions.