



**BARDOLINE®  
CLASSIC**

*Made by me!*




Before



After

**QUALITY SHINGLES  
FOR ORIGINAL ROOF**

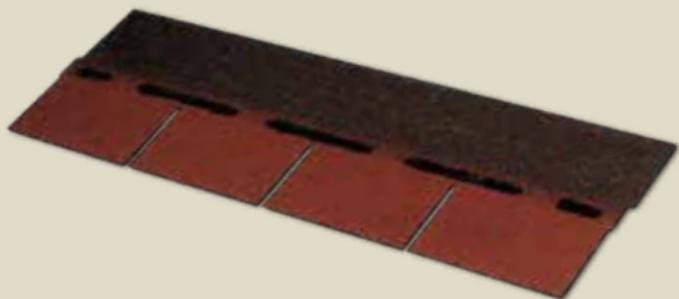

**onduline®**

Get the **roof** done - and done well

# BARDOLINE® CLASSIC



## TOOL SHELTER



Aesthetic



Easy to install



Impact resistant



Watertight

# BARDOLINE® CLASSIC

With BARDOLINE®, you can cover your auxiliary building roof all by yourself, in a practical and long lasting way. Suitable for leisure outbuildings.

# BARDOLINE® CLASSIC

## Shape and color range

### RECTANGULAR



Red



Green



Brown



Slate Grey

### BEAVER



RED



GREEN



Brown




Slate Grey

### TRIANGULAR




Red



Slate Grey

## Technical characteristics

Length	100 cm
Width	34 cm
Tiles per m <sup>2</sup>	7 pcs
Weight per m <sup>2</sup>	9,4 kg

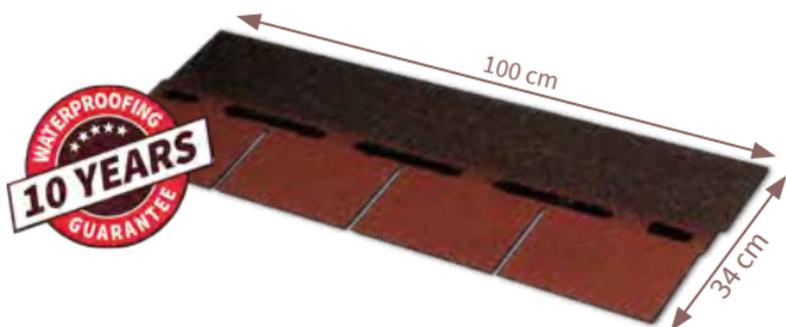

Onduline 5 years warranty for waterproofing, valid if the product has been installed in full compliance with installation recommendations (more on [onduline.com](http://onduline.com)).

# Installation in few and easy steps

1



## Support and the 1<sup>st</sup> tile row

Installation is done on full wooden decking only (minimum 12mm thick, preferred thickness 18mm). A minimum of 12.5 degrees pitch is recommended. Prepare base course cutting length ways tile tabs. The eaves course is then bonded to the adhesive tabs of the base course. Use ONDUTISS membranes for enhanced breathability.

2



## Fixing

Use five 20 mm large headed galvanised nails per shingle. Nail through strip centre band and into the top edge of the lower course.

3




### TIP!

You can bond the tile tabs by gently heating the bitumen tab on the lower course with a hot air gun.

## Installation basic rule

If needed shorten the first left (or right) strip by half a tab. On completion check the tile bonding, use adhesive to reinforce laps as required.

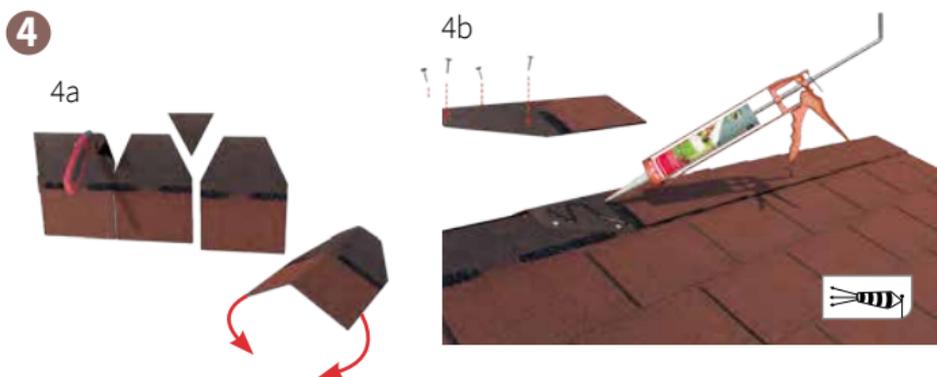

## Ridge

To complete the ridge line, start always cutting shingles to make the ridge (see 4a). Make sure that the bitumen shingles are sufficiently covered on both sides of the roof. The direction of the overlap is made in the opposite direction to prevailing winds (see 4b). BARDOLINE detail strip can also be used for the ridge.




## Job completed

BARDOLINE® shingles provide an attractive, colored and long lasting finishing to a wide variety of garden buildings.

## CALCULATE THE PITCH OF YOUR ROOF

$$\text{Pitch (\%)} = \frac{h}{b} \times 100$$

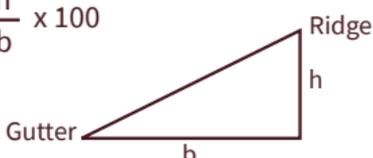

Watch the video!

## Accessories

---



**BARDOLINE DETAIL STRIP**  
Available in matching colours with the roof shingles for seamless finish



**ONDUTISS AIR**  
Breathable waterproof membrane helps preserve the waterproofing of a roof. Ensure to use a membrane below BARDOLINE on pitches below 20 degrees.



### GARDEN SHED



*Made by me!*

#### How to cut and trim your product?

You can easily cut the shingles with a roofers' cutter.



**BARDOLINE®**  
**CLASSIC**



**BUNGALOW**



**CARPORT**

A perfect solution for all types of roofs.  
Do you feel the need to liven up your new  
garden shed?

With **BARDOLINE®** you can do it fast, easily  
and reliably! Try it, you will be amazed!

*Made by me!*

# Made by me!



Norm EN 544

Fully compliant with regulations



Sustainable product & production because we care about environment!

## Onduline Building Products Ltd

The Whitechapel Building  
10 Whitechapel High Street  
London  
E1 8QS  
T. +44 (0)207 7270533  
E. enquiries@onduline.net

[onduline.co.uk](http://onduline.co.uk)



Onduline  
French joint stock company  
share capital of €11,323,485.05  
RCS Nanterre 552 088 361

**Onduline®**  
Get the **roof** done - and done well