

# Close Coupled Pan Fixing Set


## Instruction Manual

### Contents


Item	Description	Qty
1	Floor Brackets	2
2	Wall Plugs S10 x 50	2
3	Hex Head Screws 6 x 78	2
4	Washers	2
5	Screws 5 x 60	2
6	Nylon Bushes	2
7	Caps	2



Drawing for illustration purposes only.

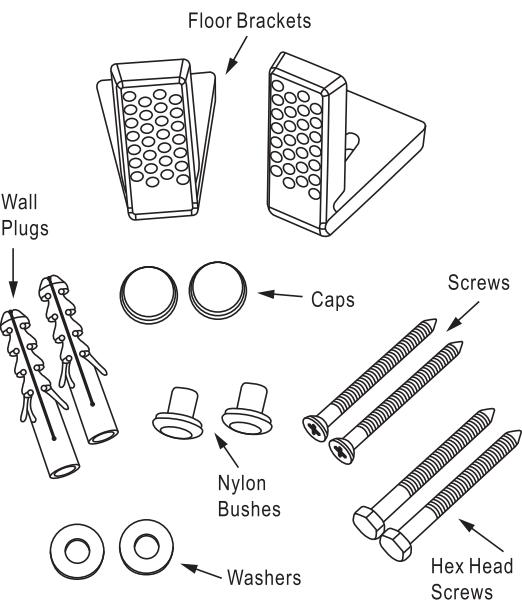

### Method of Fixing Pan:

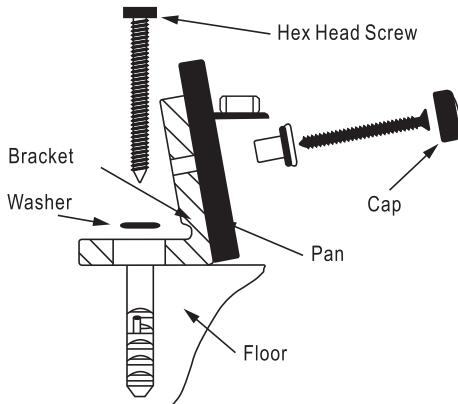


### Guarantee Terms

In the unlikely event that this product does not meet your expectations or a quality issue arises, please contact your point of purchase with the details and your proof of purchase. We reserve the right to carry out a product inspection prior to validating a claim.

The product carries a 5 year guarantee which covers against manufacturing defects. Serviceable parts which are subject to wear and tear are covered at the discretion of the retailer. The guarantee does not cover deterioration through normal wear and tear, deterioration due to infestation, wilful damage, accident, improper or negligent use, unauthorised modification or repair, or incorrect storage.

During the guarantee period for the product, we will, at our discretion, repair or replace the product, or the defective part, subject to the guarantee exclusions set out above and your claim being validated.

### Tools Required (Not Supplied)

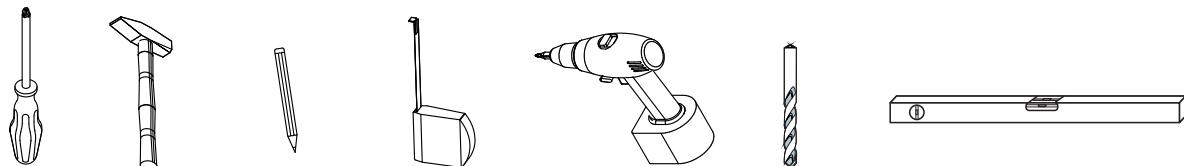


# Installation

## **Caution: Take great care when drilling floors or walls to avoid wires and pipes which may run beneath.**


Exercise great care when using power tools near water. The use of a residual current device (RCD) or cordless drill is recommended. Always double-check the position and your measurements before drilling holes. Protective eyewear should be used when drilling.

Keep children away from the work area and remember that all small parts, plastic bags and tools should also be kept out of reach of children.


**Fixing tip:** A piece of insulating tape or a couple of layers of masking tape applied before marking out the fixing holes will help stop the drill from wandering on tiled surfaces.

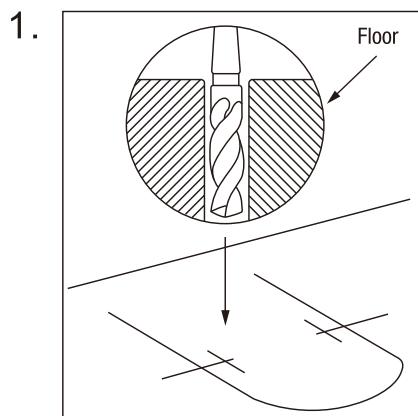


Using a 10mm masonry drill bit,  
drill a 10mm dia. approx. 45mm from  
the edge of the pan. Min drill hole depth 60mm

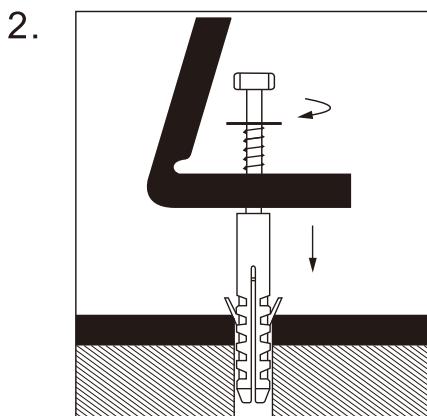


Tighten fixing bracket

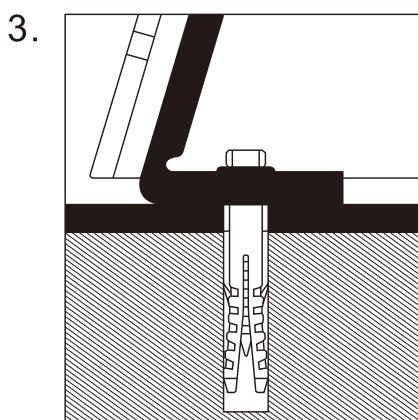

Put on the new toilet

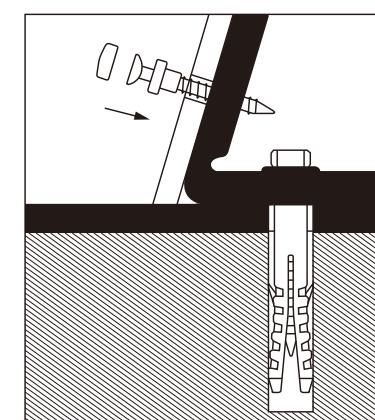

Tighten the screws

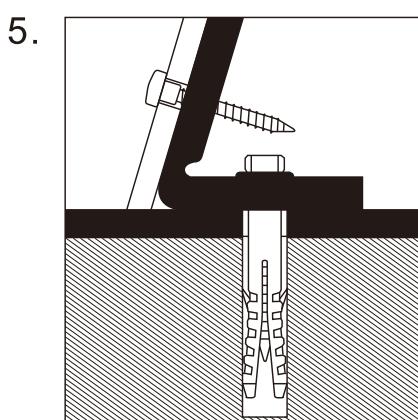

Put on the caps