



metrotile
AQUAPAN
LIGHTWEIGHT METAL ROOFING SYSTEM

EASY TO BUILD

STRONG & SECURE
LASTS 20 YEARS +
POPULAR TILE SHAPE



**UNIQUE
MULTIPLE TILE SHEETS
SIMPLY OVERLAP
TO FIT ANY SIZE OF ROOF**



AQUAPAN's distinct profile and charcoal colourway can enhance a wide variety of small building projects, from our beloved toolsheds to the popular garden office.

Installation is easy and quick. There is no need to cut, and there is all you need including barge boards, ridges, end caps and fixings (*see over for full details*).

So if you are searching for a good looking, high quality roof at a sensible price, contact us today - we will be happy to help

To find out more about AQUAPAN

call now on **01249 658514**

or visit **www.metrotile.co.uk/aquapan**

Innovation by design

 **metrotile**
AQUAPAN
LIGHTWEIGHT METAL ROOFING SYSTEM



so quick and easy to build...

Aquapan parts simply overlap- with no wastage

Once you have planned your roof, simply follow this step by step guide. You only need a power screwdriver and a metal or nibbling shear (for finishing touches) to install your roof. Aquapan's unique system involves no difficult cutting or bending.

IMPORTANT

These instructions are guidelines only and do not include all the appropriate equipment which should be used in accordance with safety regulations.

1 Attach Barge Boards

Firstly fix the Barge Boards to all sides of the roof. Align with the existing roof boarding at the eaves and align flush at the ridge. Overlap the Barge Boards as required giving a minimum of 25mm overlap. To fix into place, screw the special screw and washer fittings into sides of each Barge Board at overlaps and centres. Use 3 fittings for each Barge Board including overlaps - see fig. 7 for positioning.

2 Set out first row of Tile Sheets




Laying right over the left, set out the first row of Tile Sheets horizontally across the roof at the eaves, centering the Tile Sheets to allow equal gutters up to a maximum of 75mm either side. Lay the last Tile Sheet in the row by simply overlapping it as required - there is no need to cut. Please note: only overlap Tile Sheets by full pan widths and depths.

3 Set out the Tile Sheets vertically

Allow a 50mm gap at the ridge (for the Ridge Cap) and an adequate overhang at the eaves. Set out the number of Tile Sheets and overlapping required for the vertical using full pan widths and depths.






*The roof example illustrated has
8 Tile Sheets per pitch:
4 horizontal with overlap = 17 pans wide
2 vertical with no overlap = 14 pans deep*

Do not fix into position at this point.

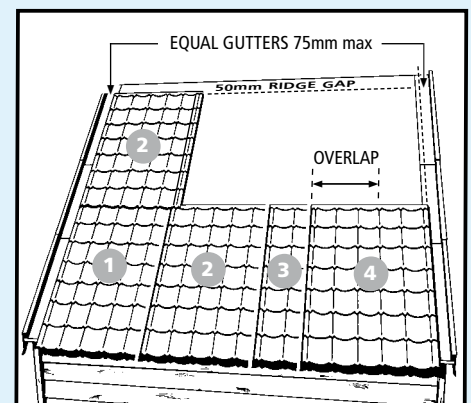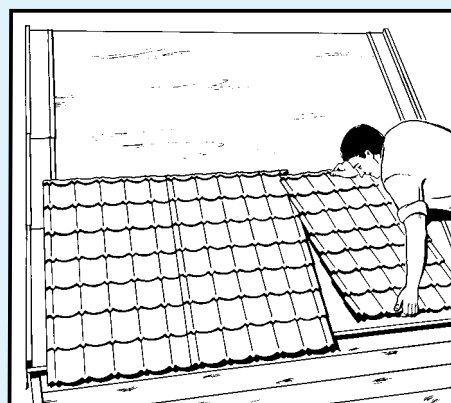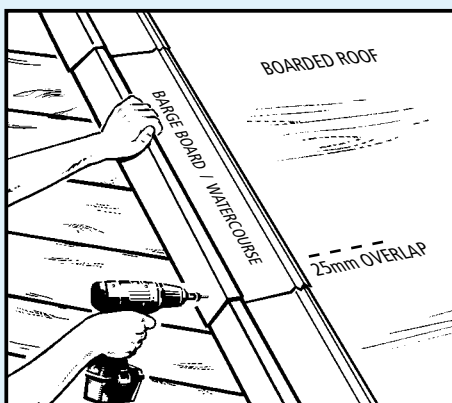




4 Fixing the Tile Sheets

Start fixing the first complete row of Tile Sheets at the eaves into position. Working from left to right, fix each Tile Sheet by using the special screw and washer fixings fixed securely into the centre of the pans and near to the joins. Please refer to fig. 7 for recommended fixing positions. Once the first row is secure, progress to place and fix the next row up of Tile Sheets into position. Align each tile with the row below, lay right over left and overlap with a full Tile Sheet at the end of the row.

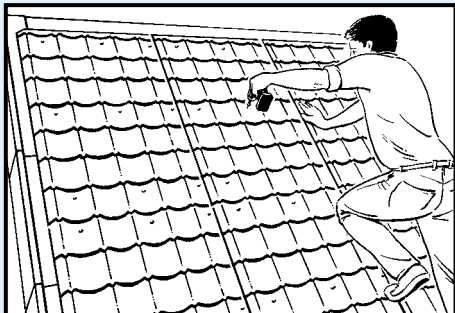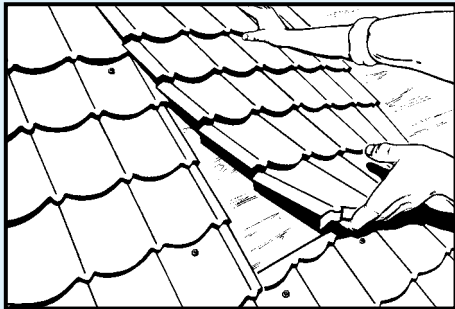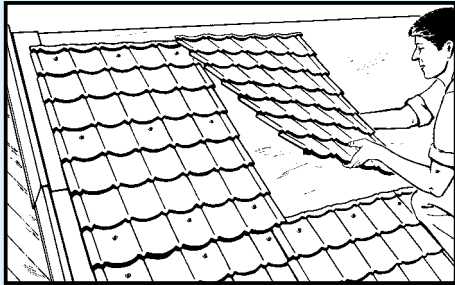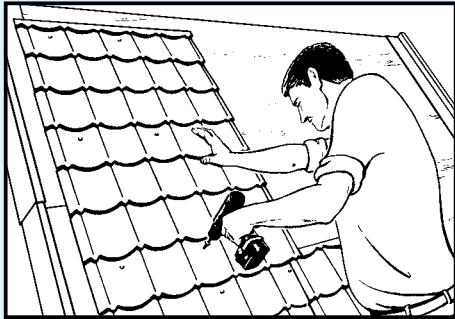

5 Attach Ridge End Caps



Once all the Tile Sheets have been fixed securely into position, you are now ready to attach the Ridge End Caps and Ridge. Place Ridge End Caps into position centering on the apex of the roof and fix a screw and washer fixing into the centre as shown. Bend over both of the ears in order to underlap the Ridge Cap when fitted.

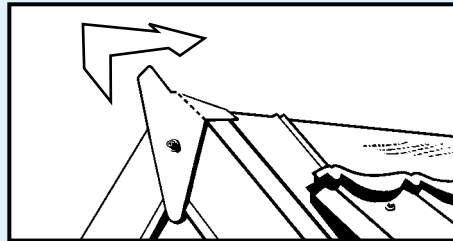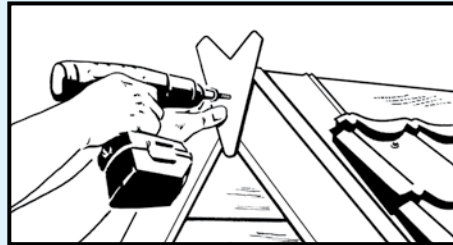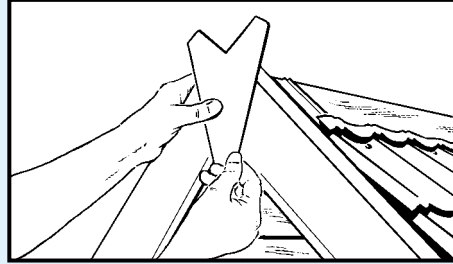

6 Attach the Ridge Cap

Put the first Ridge Cap into place flush with the end of the Barge Board and Ridge End Cap. Fix using the screw and washer fixings attached securely into the Barge Boards at the end, and then along the length down into the flange of the Tile Sheet underneath. Overlap the next Ridge Cap and fix a screw and washer fixing through both sections. Repeat along the length of the ridge using a full Ridge Cap at the other end.


See fig. 7 for fixing positions.

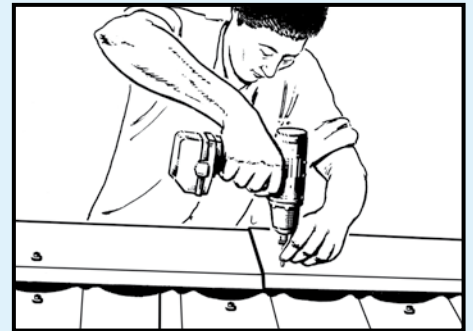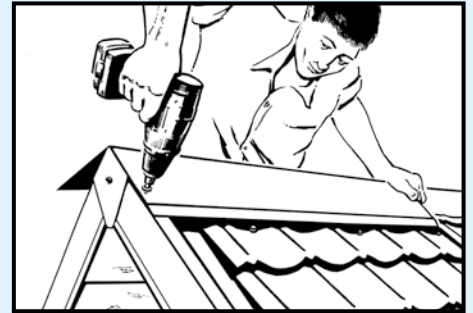


7 Fixing Positions

Use this example as a guide for the fixing positions. We recommend using 9 fixings per Tile Sheet and 3 fixings per Barge Board including overlap.

- *Screw & washer Fixings*

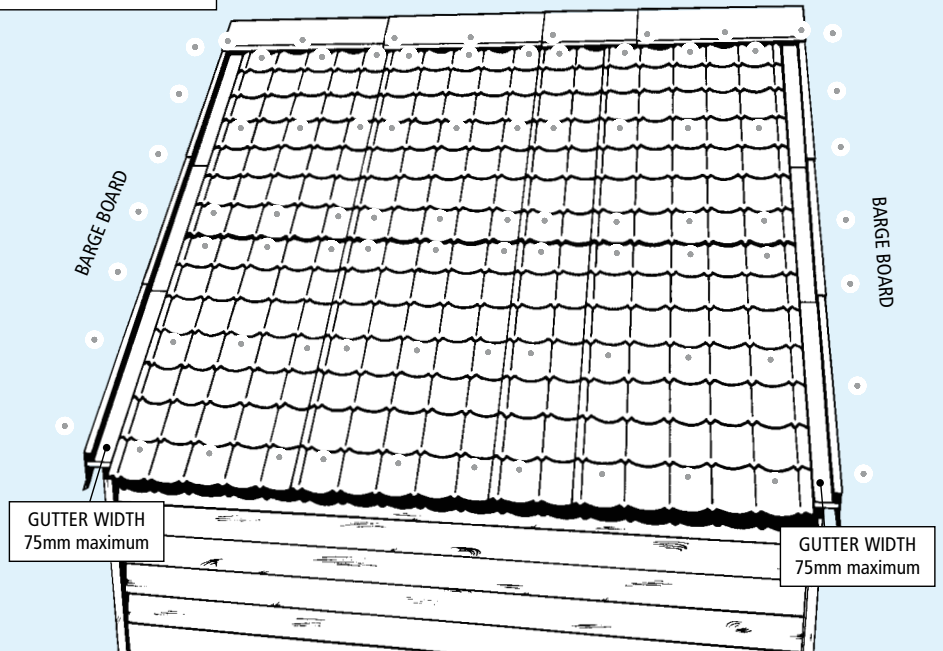



metrotile

AQUAPAN

LIGHTWEIGHT METAL ROOFING SYSTEM

How does it work?

Each component is designed to overlap and be screw-fixed together. You can fit any size of roof by overlapping the tile sheets by any combination of full tile widths, both vertically and horizontally. Barge Boards can be overlapped to fit any length at the eaves, and provide a watercourse underneath the tiles. Similarly Ridges can overlap to accommodate any length. Ridge End Caps are used to finish off at the ridge ends. All the pieces are designed to be screwed down using special waterproof fixings.

What can Aquapan be installed on top of?

Always work on a sturdy nailable base, tile battens or purlins. For battens set out at 155mm from front of batten to front of battens. We recommend using a good quality underlay. In the case of refurbishment, an existing roof covering (eg. bitumen sheets or shingle tiles) need not be pulled down, it can serve as an underlay.

Do I need a heavy roof structure?

No. Aquapan is incredibly light, weighing only 6kg/m² so there is no need for excessive roof structures.

Is an Aquapan roof easy to plan?

Yes. Every Aquapan Tile Sheet has 35 tiles: 5 tiles in the width and 7 tiles in the depth. Simply work out the number of sheets you will need to cover your roof area, using the dimensions on the right. There is no need to cut as each Aquapan tile sheet can be overlapped by using a full tile shape both in width and in depth (overlap one, two, three, four tiles etc as required).

What tools do I need?

You only need a power screwdriver and a metal or nibbling shear (for finishing touches) to install your roof. Aquapan's unique system involves no cutting or bending.

What is Aquapan made of?

Each component is made from high grade steel, primed with a water-based acrylic and coated with Aluzinc® (55% Aluminium, 45% Zinc) and bonded with coloured stone granules. The result is incredibly strong, lightweight and resistant roofing that will withstand fire, storm, hail and snow. It is also resistant to corrosive atmospheric conditions.

Should I allow for wastage?

There is no need. If you plan correctly there should be no wastage at all.

How long does it last?

An Aquapan roof is expected to last in excess of 20 years!

Where can I buy Aquapan?

Aquapan is exclusively available from Metrotile UK.

Call us today for further information and a FREE estimate

Tel **01249 658514**

or visit **www.metrotile.co.uk/aquapan**


Aquapan is exclusively manufactured by

Metrotile UK Ltd


Unit 3, Sheldon Business Park
Sheldon Corner
Chippenham
Wiltshire
SN14 0RQ

tel +44 (0) 1249 658 514
fax +44 (0) 1249 658 453
email sales@metrotile.co.uk
web www.metrotile.co.uk/aquapan


1. Tile Sheets (5 tiles x 7 tiles)

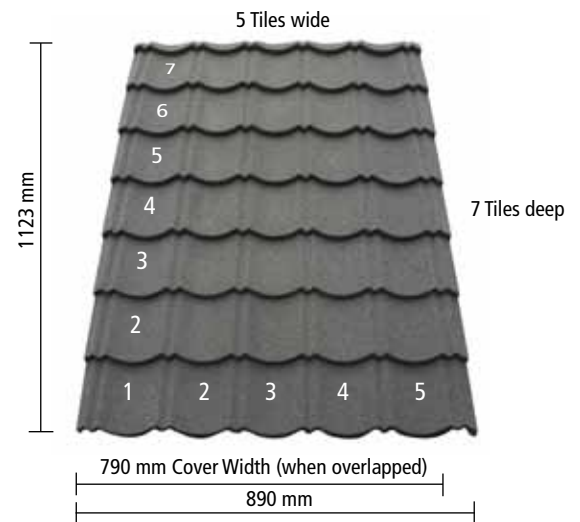


2. Barge Boards

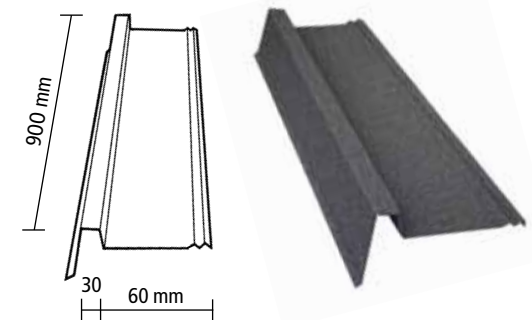

3. Ridges

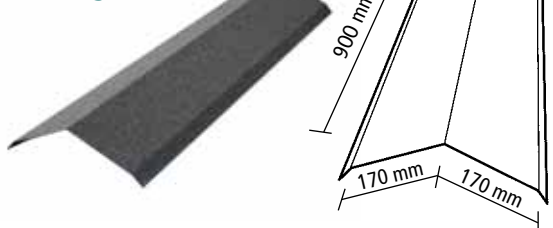

4. Ridge End Caps

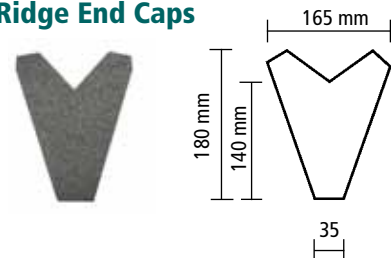

5. Screw & Washer Fixings



35mm screws required.



metrotile

AQUAPAN

LIGHTWEIGHT METAL ROOFING SYSTEM

Innovation by design