




SUNSYNK-L5.3

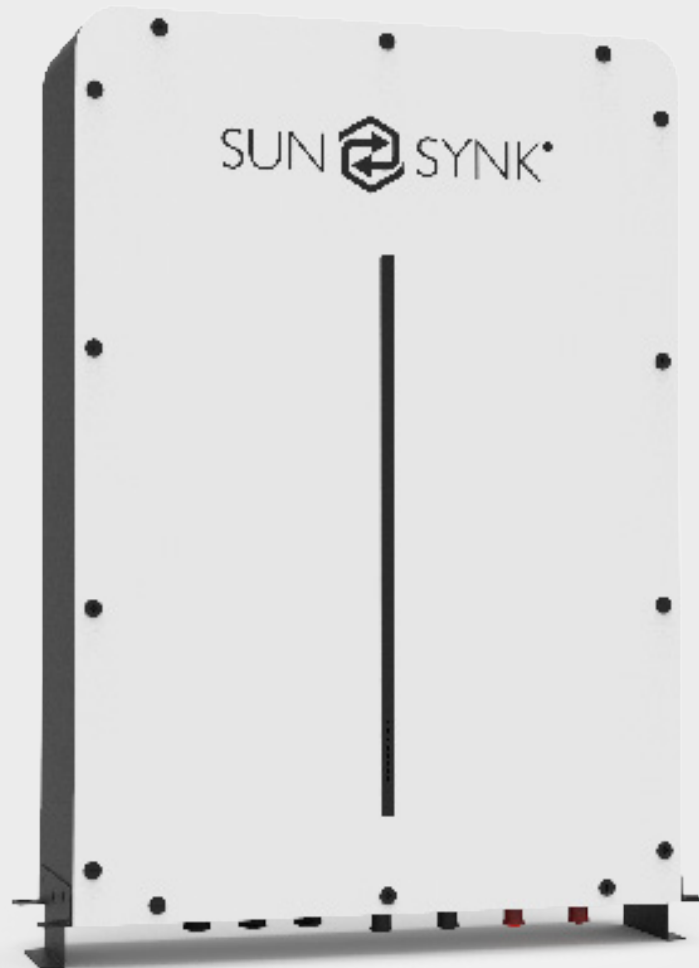

DATASHEET

www.sunsynk.com
sales@sunsynk.com
customerservices@sunsynk.com

Model		SUNSYNK-L5.3
Main Parameter		
Battery Chemistry		Lithium Ferro Phosphate (LifePO4 or LFP)
Capacity		104 Ah
Scalability		Max. 32 pcs in parallel (170kWh)
Nominal Voltage		51.2 V
Operating Voltage		43.2~57.6 V
Energy		5.32 kWh
Usable Energy ^[1]		4.79 kWh
Charge/Discharge Current	Recommend ^[2]	50 A
	Max. ^[2]	100 A
	Peak (2mins,25°C)	150 A
Other Parameter		
Recommend Depth of Discharge		90%
Dimension (W/H/D)		440*620*135 mm (don't include Circuit Breaker, terminals and hanging boards)
Weight Approximate		46 kg
Master LED Indicator		5 LED (SOC 20%~100%)
		3 LED (working, alarming, protecting)
IP Rating of Enclosure		IP65
Working Temperature		Charge: 0°C~+55°C (optional heating, -20°C~+55°C) Discharge: -20°C~+55°C
Storage Temperature		-20°C ~ +35°C
Humidity		5% ~ 95%
Altitude		≤2000m
Cycle Life		≥6000 (25±2°C, 90%DOD, 0.5C/0.5C, 70%EOL)
Installation		Wall Mounted (Support 19-inch standard cabinet)
Communication Port		CAN2.0, RS485
Life Cycle Power During Warranty Period ^[3]		16MWh@70%EOL
Certification		IEC62619, CE, UK, CEC, UN38.3

^[1] DC Usable Energy, test conditions: 90% DOD, 0.5C charge & discharge at 25° C. System usable energy may vary due to system configuration parameters.

^[2] The current is affected by temperature and SOC.

^[3] The warranty is due whichever reached first of warranty period or energy throughout.



DC 125A Circuit Breaker





CONTACT US

Call us: +44 151 832 4300 **Email us:** sales@sunsynk.com

HK Address: Room 702-704, 7/F Texwood Plaza, 6 How Ming Street, Kwun Tong, Kowloon, Hong Kong.

UK Address: Sunsynk UK Ltd, 17 Turnstone Business Park, Mulberry Avenue, Widnes, Cheshire, WA8 0WN.

SA Address: Globaltech Sunsynk South Africa (Pty) Ltd, Unit 2 Highview Boulevard, Ferndale 2194.

NL Address: Sunsynk NL BV, Henri Wijnmalenweg 8, 5657 EP Eindhoven, Netherlands.

GlobalTech Ltd



Powered by
SUN SYNK