
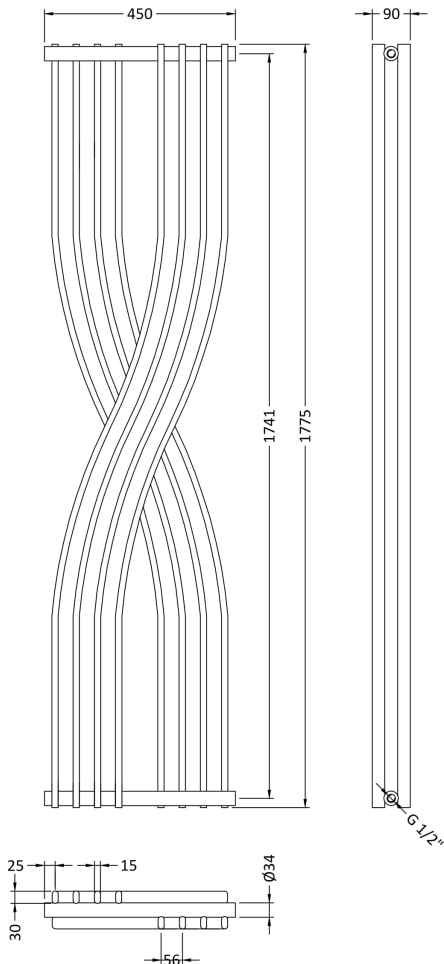


## CUSTOMER DATA SHEET - HEATING

**SALES CODE:** BHSPA94

**DESCRIPTION:** Spirit Designer Radiator 1775mmx450mm

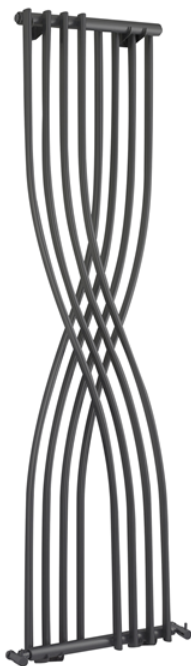

### PRODUCT DIMENSIONS

| Height (mm) | Width (mm) | Depth (mm) | Length (mm) | Nett Wgt Kg |
|-------------|------------|------------|-------------|-------------|
| 1775        | 450        | 95         |             | 15.86       |

### PACKAGING DIMENSIONS

| Height (mm) | Width (mm) | Length (mm) | Gross Wgt Kg |
|-------------|------------|-------------|--------------|
| 115         | 520        | 1850        | 15.86        |

### PACKAGING DATA

|            |                               |              |             |
|------------|-------------------------------|--------------|-------------|
| Box Colour | White Cardboard Shrinkwrapped |              |             |
| Box Qty    | 1                             | Label Colour | White Label |
| Label Size | 100 x 50                      | Label Qty    | 2           |

### OUTER BOX DIMENSIONS (If Applicable)

| Height (mm) | Width (mm)    | Length (mm) | Gross Wgt Kg |
|-------------|---------------|-------------|--------------|
|             |               |             |              |
| Barcode     | 5056211828822 |             |              |

### PRODUCT DETAILS

|                              |                |     |      |      |      |      |
|------------------------------|----------------|-----|------|------|------|------|
| Contry of Origin             | China          |     |      |      |      |      |
| Fitting Instruction          |                |     |      |      |      |      |
| RAL No                       | 7016           |     |      |      |      |      |
| Heat Element Wattage         | Not Applicable |     |      |      |      |      |
| BTU Outputs                  | 30°C           | 946 | 50°C | 2020 | 60°C | 2559 |
| Pipe Centres - If Vertical   | 540mm          |     |      |      |      |      |
| Pipe Centres - If Horizontal | N/A            |     |      |      |      |      |
| Packaging Volume (L)         | 118.4          |     |      |      |      |      |
| Wall to Ctr of Tappings      | 60             |     |      |      |      |      |

|                                 |            |     |      |     |      |     |
|---------------------------------|------------|-----|------|-----|------|-----|
| Certification                   | CE & UKCA  | No  | RoHS | N/A | WEEE | N/A |
| Colour/Finish                   | Anthracite |     |      |     |      |     |
| Product Material                | Steel      |     |      |     |      |     |
| Heat Element Wattage Compatible | N/A        |     |      |     |      |     |
| Thermal Outputs (Watts)         | 30°C       | 277 | 50°C | 592 | 60°C | 776 |
| Max Projection                  |            |     |      |     |      |     |
| Tube Diameter                   | N/A        |     |      |     |      |     |
| Floor to Ctr of Tappings        | N/A        |     |      |     |      |     |
| Dual Fuel                       | N/A        |     |      |     |      |     |