


## CUSTOMER DATA SHEET - HEATING

**SALES CODE:** BHLUA74

**DESCRIPTION:** Lucia Double Panel Rad 1800X354 Anth

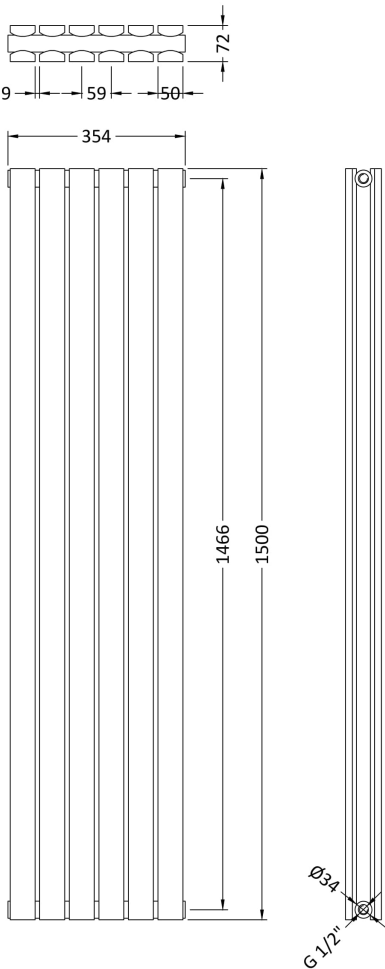

### PRODUCT DIMENSIONS

| Height (mm) | Width (mm) | Depth (mm) | Length (mm) | Nett Wgt Kg |
|-------------|------------|------------|-------------|-------------|
| 1800        | 354        | 79         |             | 40.1        |

### PACKAGING DIMENSIONS

| Height (mm) | Width (mm) | Length (mm) | Gross Wgt Kg |
|-------------|------------|-------------|--------------|
| 105         | 415        | 1865        | 40.1         |

### PACKAGING DATA

|            |                               |              |             |
|------------|-------------------------------|--------------|-------------|
| Box Colour | White Cardboard Shrinkwrapped |              |             |
| Box Qty    | 1                             | Label Colour | White Label |
| Label Size | 100 x 50                      | Label Qty    | 2           |

### OUTER BOX DIMENSIONS (If Applicable)

| Height (mm) | Width (mm)    | Length (mm) | Gross Wgt Kg |
|-------------|---------------|-------------|--------------|
|             |               |             |              |
| Barcode     | 5056211828747 |             |              |

### PRODUCT DETAILS

|                              |                |      |      |      |      |      |
|------------------------------|----------------|------|------|------|------|------|
| Contry of Origin             | China          |      |      |      |      |      |
| Fitting Instruction          |                |      |      |      |      |      |
| RAL No                       | 7016           |      |      |      |      |      |
| Heat Element Wattage         | Not Applicable |      |      |      |      |      |
| BTU Outputs                  | 30°C           | 2075 | 50°C | 3873 | 60°C | 4907 |
| Pipe Centres - If Vertical   | 444mm          |      |      |      |      |      |
| Pipe Centres - If Horizontal | N/A            |      |      |      |      |      |
| Packaging Volume (L)         | 73.2           |      |      |      |      |      |
| Wall to Ctr of Tappings      | 85             |      |      |      |      |      |

|                                 |            |     |      |      |      |      |
|---------------------------------|------------|-----|------|------|------|------|
| Certification                   | CE & UKCA  | Yes | RoHS | N/A  | WEEE | N/A  |
| Colour/Finish                   | Anthracite |     |      |      |      |      |
| Product Material                | Steel      |     |      |      |      |      |
| Heat Element Wattage Compatible | N/A        |     |      |      |      |      |
| Thermal Outputs (Watts)         | 30°C       | 608 | 50°C | 1135 | 60°C | 1417 |
| Max Projection                  |            |     |      |      |      |      |
| Tube Diameter                   | N/A        |     |      |      |      |      |
| Floor to Ctr of Tappings        | N/A        |     |      |      |      |      |
| Dual Fuel                       | N/A        |     |      |      |      |      |