

# Towel Warmer - Technical Specification

**Primaflow**

**F&P**


WE SIMPLY DELIVER MORE

## 425341CP

	<b>EAN</b>	<b>5060717430977</b>
	<b>Finish</b>	<b>Straight Chrome</b>
	<b>Width</b>	400mm
	<b>Height</b>	1000mm
	<b>Fitted Depth</b>	79mm
	<b>Horizontal Profile Size</b>	22mm
	<b>Vertical Profile Size</b>	40mm x 30mm D Shaped
	<b>Thread to Thread Centre</b>	355mm
	<b>Wall to Thread Centre</b>	64mm
	<b>Thread Orientation</b>	Vertical Into Bottom
	<b>Thread Size</b>	1/2" BSP
	<b>Weight</b>	4.9 kg

### Installation & Usage Options


Central Heating System

	<b>Thermal Output dt50</b>	266 Watts – 907 BTU
	<b>Thermal Output dt30</b>	142 Watts – 484 BTU
	<b>Maximum Working Pressure</b>	1000 kPa – 10 Bar

Option – Electric Only or Dual Fuel

	<b>250 Watts Electrical Element Kit – EAN 5060235341502</b>
--	---

### Fitted Dimensions

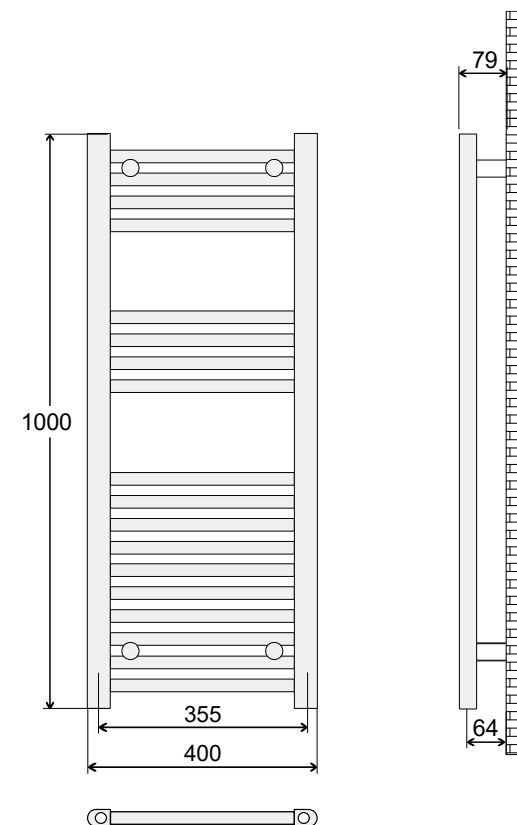

#### Product Information

Conform to EN 442 standard

CE Mark applied

Brackets and Fixings included

#### Specification

Pressure tightness: No leakage at 1.3 x MOP

Resistance to pressure: No breakage at 1.69 x MOP

Maximum operating pressure (MOP): 1000 kPa

Maximum surface temperature: 110°C

Resistance against corrosion: No corrosion after 100 h humidity

Primaflow F&P

Votec House, Hambridge Lane, Newbury, RG14 5TN