

**iQ700, Downdraft hood, 90 cm,  
clear glass, Black  
LD98WMM60B**



The seamlessly designed glassdraftAir is only visible when in use, with an impressive performance thanks to the new Guided Air technology.

- ✓ iQdrive motor - The quiet, high-performance motor ensures efficient removal of odours and steam.
- ✓ iQdrive motor keeps your kitchen quiet and vapour free.
- ✓ cookConnect – Use your hob to control your extractor hood's power level and lighting.
- ✓ voiceControl – Control hood functions and lighting using your voice.
- ✓ Home Connect – The app that makes your hood work smarter.

**Optional accessories**

HZ9VDSB1 90° flat duct bend horizontal, HZ9VDSB2 90° flat duct L vertical, HZ9VDSI0 Adapter round-flat, HZ9VDSI1 90° Adapter round-flat, HZ9VDSM1 Straight tube 500mm, HZ9VDSM2 Straight tube 1000mm, HZ9VDS51 Connector sleeve (female), LZ21WWB16 Clean Air Plus odor filter (replacement), LZ21WWI17 Clean Air Plus recirculation kit, LZ21WWJ12 Long Life recirculation kit, LZ21WWM11 Installation kit remote motor, LZ29WWY12 Mounting kit for seamless installation, LZ31WWX11 Flat duct adapt.round 90° DN150 Metal, LZ31XXX11 Aluflex pipe cyl. 150

**Features**

**Technical Data**

Typology: .....	Downdraft
Length electrical supply cord: .....	130 cm
Required niche size for installation (HxWxD): .....	703mm x 854.0mm x 123mm mm
Height of the appliance: .....	709 mm
Weight: .....	41.1 kg
Control panel: .....	Electronic
Number of speed settings: .....	3-stage + 2 intensive
Maximum output air extraction: .....	519 m³/h
Boost position output recirculating: .....	596 m³/h
Maximum output recirculating air: .....	456 m³/h
Boost position air extraction: .....	833 m³/h
Maximum Air flow: .....	519 m³/h
Noise level: .....	62 dB(A) re 1pW
Diameter of air outlet: .....	150 mm
Grease filter material: .....	Washable stainless steel
EAN code: .....	4242003907122
Connection Rating: .....	300 W
Fuse protection: .....	10 A
Nominal power: .....	220-240 V
Frequency: .....	50; 60 Hz
Plug type: .....	GB plug
Installation type: .....	Built-in



## iQ700, Downdraft hood, 90 cm, clear glass, Black LD98WMM60B

### Features

#### Connectivity

- Home Connect: Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- Interval function: available via Home Connect
- Silence function: available via Home Connect

#### Features

- Fully automatic hood
- cookConnect hob based hood control
- climateControl Sensor
- 3 power levels and 2 intensive settings
- touchControl
- The standard functions are located on the right-hand user interface
- Efficient BLDC motor
- Automatic intensive revert (6mins)
- Automatic after running (Automatic after running (10 minutes))
- 2 x metal grease filter cassettes
- Grease and charcoal filter saturation indicators
- The filter service button automatically lifts filters into service position for easy removal

#### Design

- 90 cm wide
- Installation: integrated
- The glass panel can be easily removed and cleaned
- Suitable for installation in an island or Semi-island kitchen solution

#### Performance

- Suitable for ducted and re-circulating operation
- For recirculated extraction Clean Air Plus recirculation kit (accessory) needed
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 519m<sup>3</sup>/h
- Intensive 833 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 62dB(A) re 1 pW
- Intensive: 71 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode:
- Max. normal use: 456m<sup>3</sup>/h
- Intensive: 596m<sup>3</sup>/h
- Noise level in recirculation mode:
- Max. normal use: 66dB(A) re 1 pW
- Intensive: 71 dB(A) re 1 pW

#### Planning and installation information

- Extension height 250 mm
- Dimensions (HxWxD): 709 x 912 x 140 mm
- Built-in dimensions (HxWxD): 703 x 854 x 123 mm
- Extractor hose 150 mm
- Electrical cable length 1.3 m
- Please reference the built-in dimensions provided in the installation drawings
- Not suitable for combination with gas hobs





#### Consumption Data

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Power rating: 300 W
- Average Energy Consumption: 37.8 kWh/year\*
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: -\*
- Grease Filtering Efficiency Class: C\*

\* In accordance with the EU-Regulation No 65/2014


## iQ700, Downdraft hood, 90 cm, clear glass, Black LD98WMM60B

### Dimensioned drawings

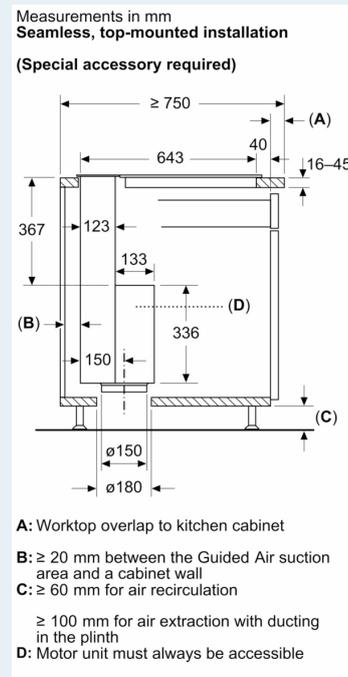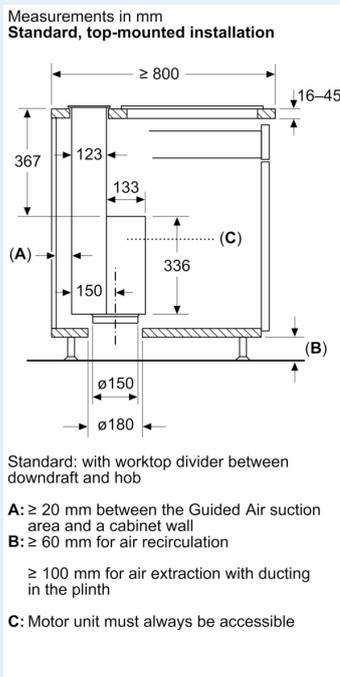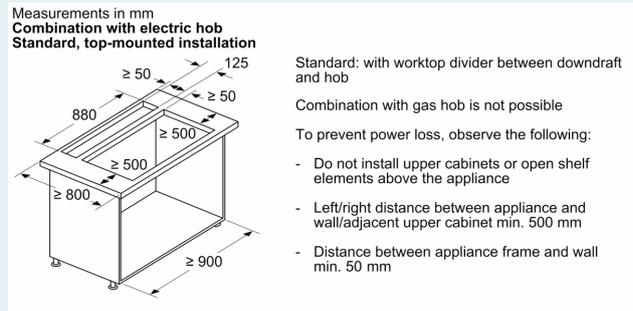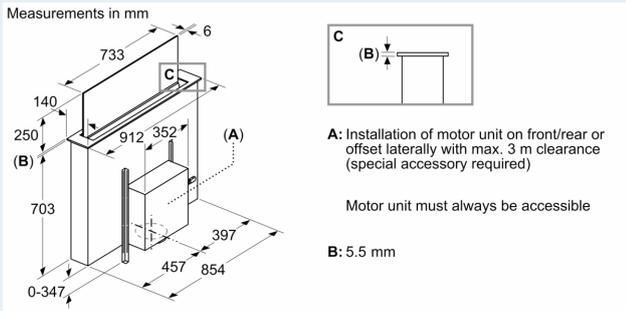


## Dimensioned drawings


### Planning recommendation, air recirculation

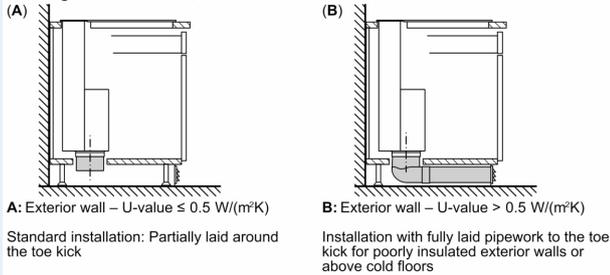


### Measurements in mm Combination with electric hob Seamless, top-mounted installation

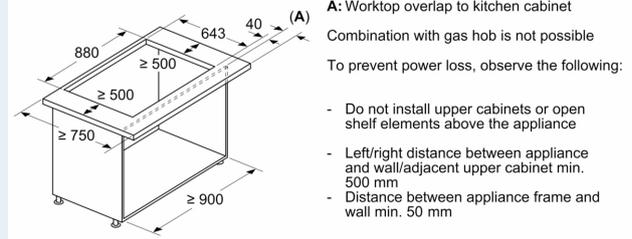


### Measurements in mm Standard, top-mounted installation

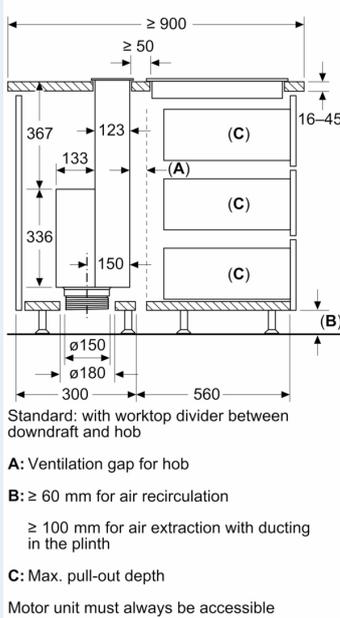

### Measurements in mm Seamless, top-mounted installation (Special accessory required)

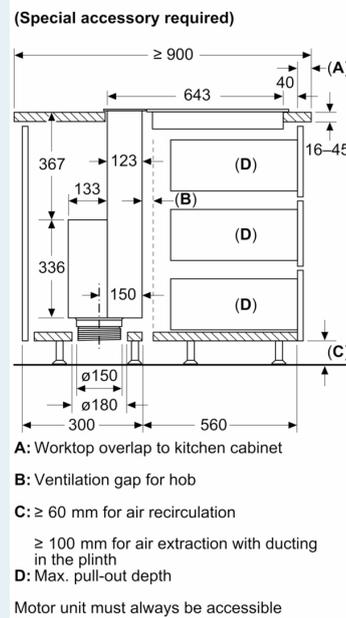

### Measurements in mm Combination with electric hob Seamless, top-mounted installation

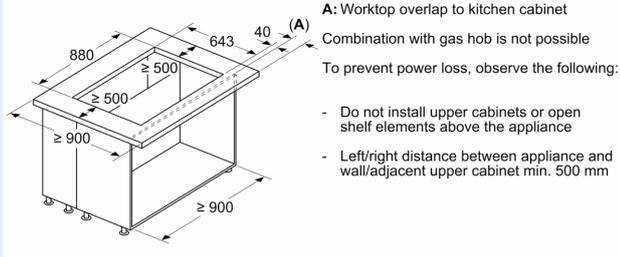

### Measurements in mm Combination with electric hob Standard, top-mounted installation

