


Angled

Traditional Thermostatic Radiator Valve & Lockshield

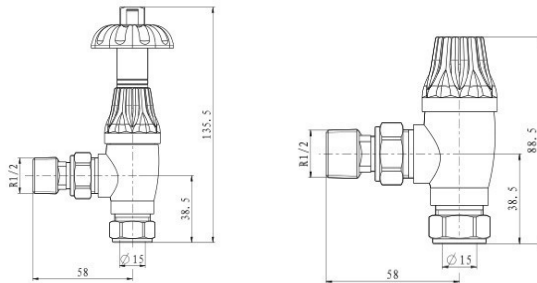

Available Finishes

Chrome Plated	Antique Copper
Antique Brass	Pewter
Brush Nickel	Black Nickel
Brushed Brass	Polish brass

Product information

Valve to radiator	1/2"
Valve to Pipe	15mm Compression
Sensor Type	Liquid Sensor
Material: Brass	Response Time: not exceed 40 Mins
Warranty: 2 Years	Hysteresis : <1 K
Weight: 740g	
Weight boxed: 770g	
Bi-Directional Valve Body	
With Frost Protection	

Pressure Rating

Max Test Pressure	10 Bar
Max Pressure differential:	0.1 Mpa

Temperature Ratings

Max flow temperature	120 °C
Temperature adjustment range	7-28 °C
Differential pressure influence:	<1 K
Max ambient temperature:	<1.5 K
Water temperature effect:	/

Flow Ratings

Nominal flow rate: Min setting	212.1 kg/h, when the temperature on 6.3°C. Max setting	210.1 kg/h, when the temperature on 28.83 °C.
Max Flow Rate	173 kgs/h	

