


Straight

Thermostatic Radiator Valve & Lockshield

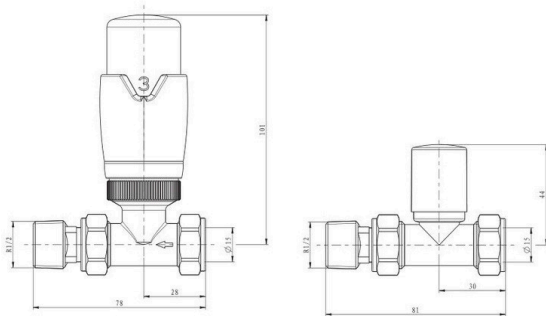

Available Finishes

Chrome Plated, Anthracite
Brush Nickel, Matt Black
White, Carbon grey

Product information

Valve to radiator 1/2"
Valve to Pipe 15mm Compression
Sensor Type Liquid Sensor
Material: Brass Response Time: not exceed 40 Mins
Warranty: 2 Years Hysteresis : <1 K
Weight: 451g
Weight boxed: 473g
Bi-Directional Valve Body
With Frost Protection: When the scale be setted " ❄ "

Pressure Rating

Max Test Pressure 10 Bar
Max Pressure differential: 0.1 Mpa

Temperature Ratings

Max flow temperature 120 °C
Temperature adjustment range 7-28 °C
Differential pressure influence: <1 K
Max ambient temperature: <1.5 K
Water temperature effect: /

Flow Ratings

Nominal flow rate: Min setting 212.1 kg/h, when the temperature on 6.3°C. Max setting 210.1 kg/h, when the temperature on 28.83 °C.
Max Flow Rate 173 kgs/h

