

TUNDISHES

FEATURES AND BENEFITS

- Type AA backflow prevention
- Slimline design (some models)
- Straight or angled versions available
- Wide range of sizes


SPECIFICATIONS

Maximum working pressure: 16.0 bar
Maximum temperature: 99°C

STANDARDS AND APPROVALS






- WRAS Approved (excluding TUND300004 and TUND300005)
- EN 1717

TYPICAL INSTALLATION

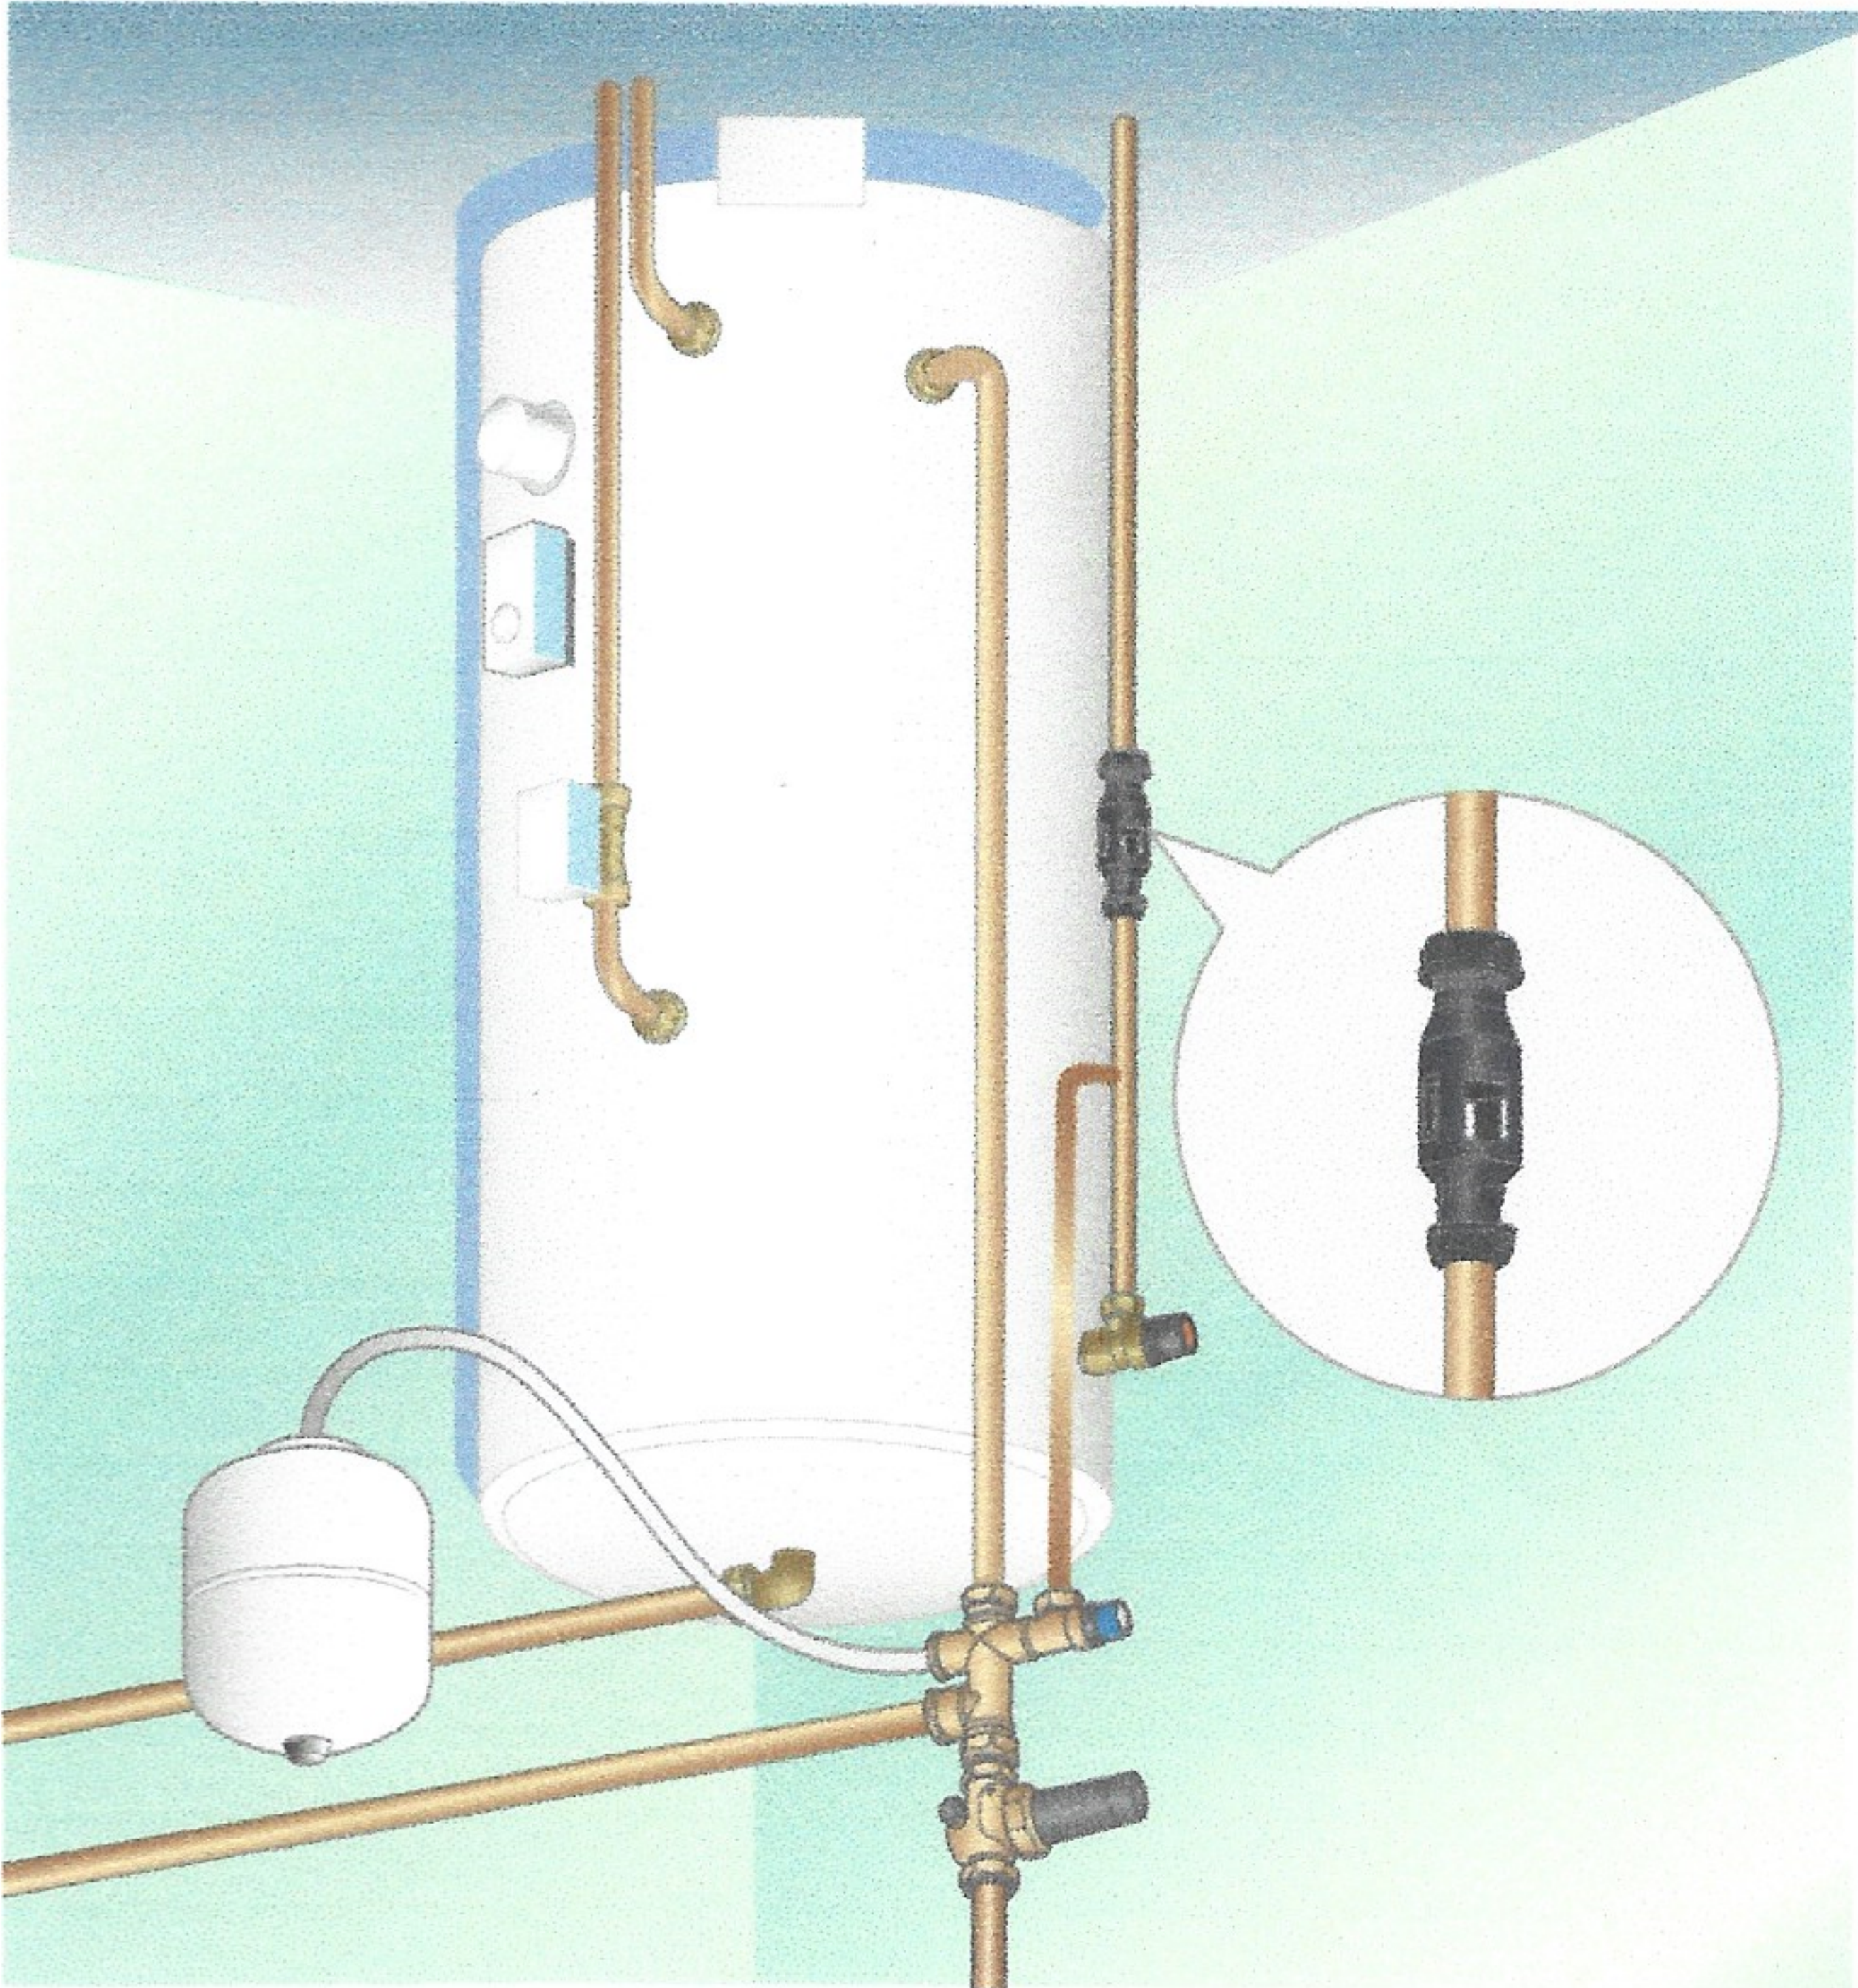

DIMENSIONS

All measurements in mm unless otherwise stated

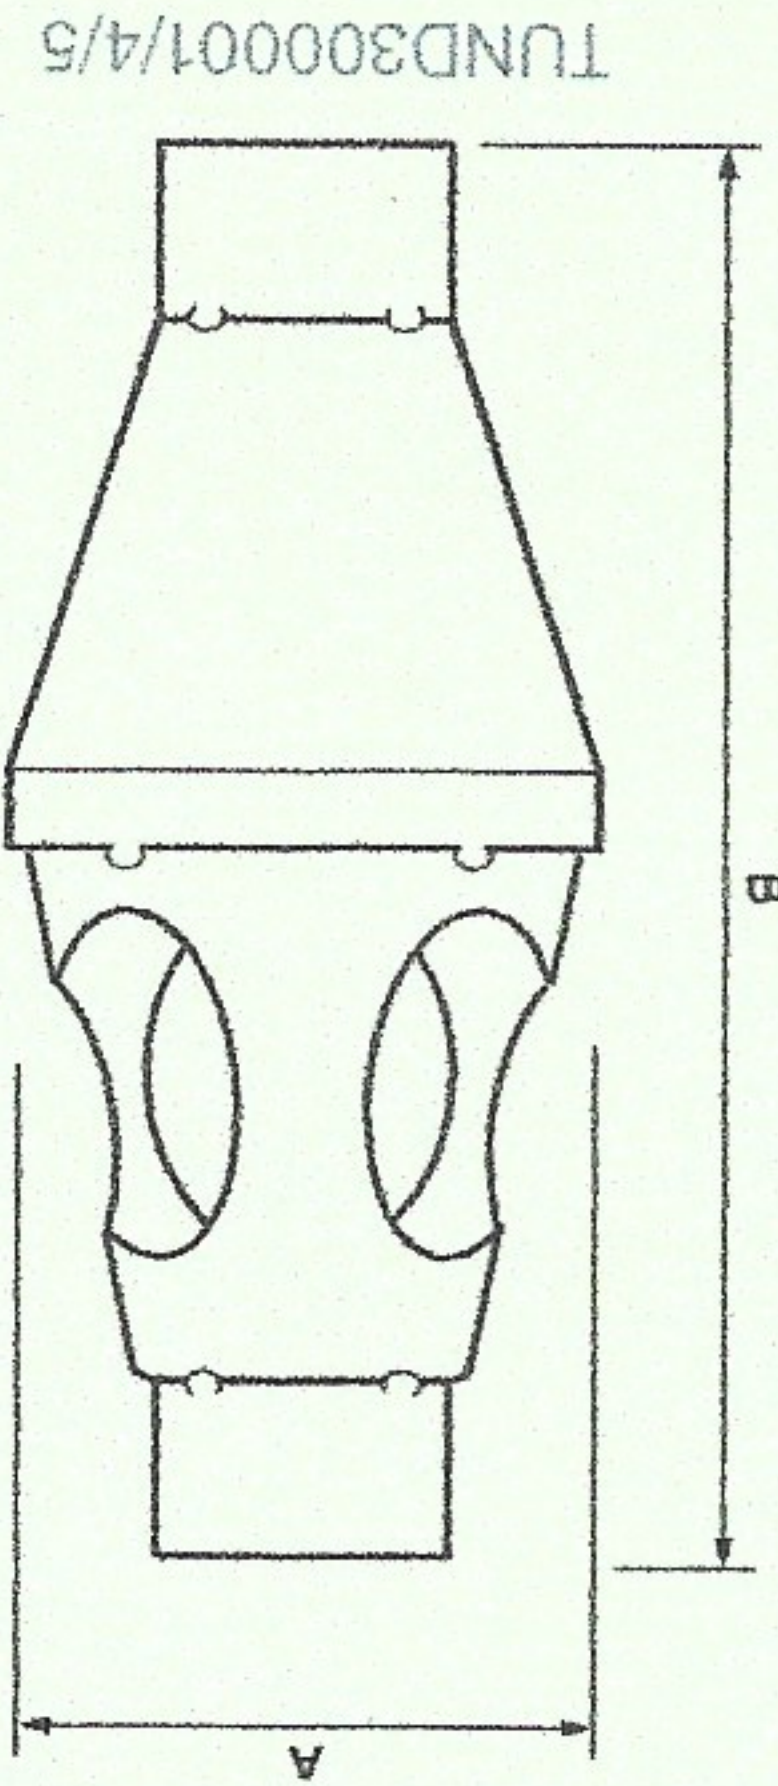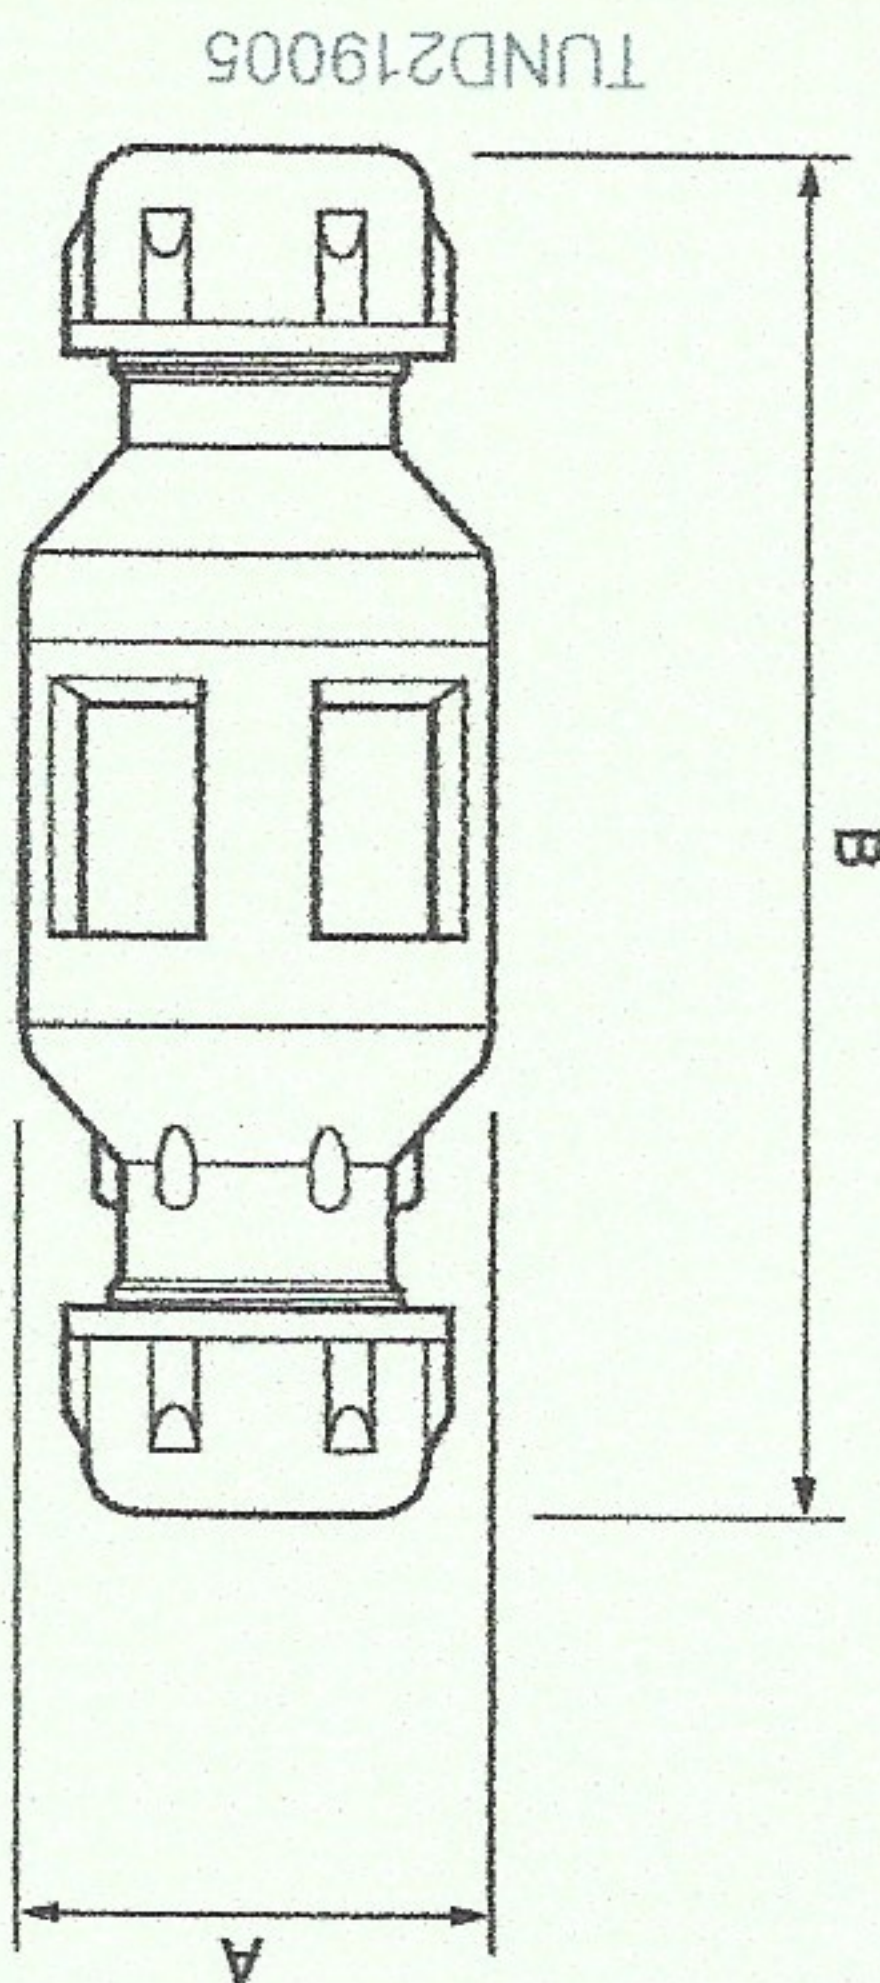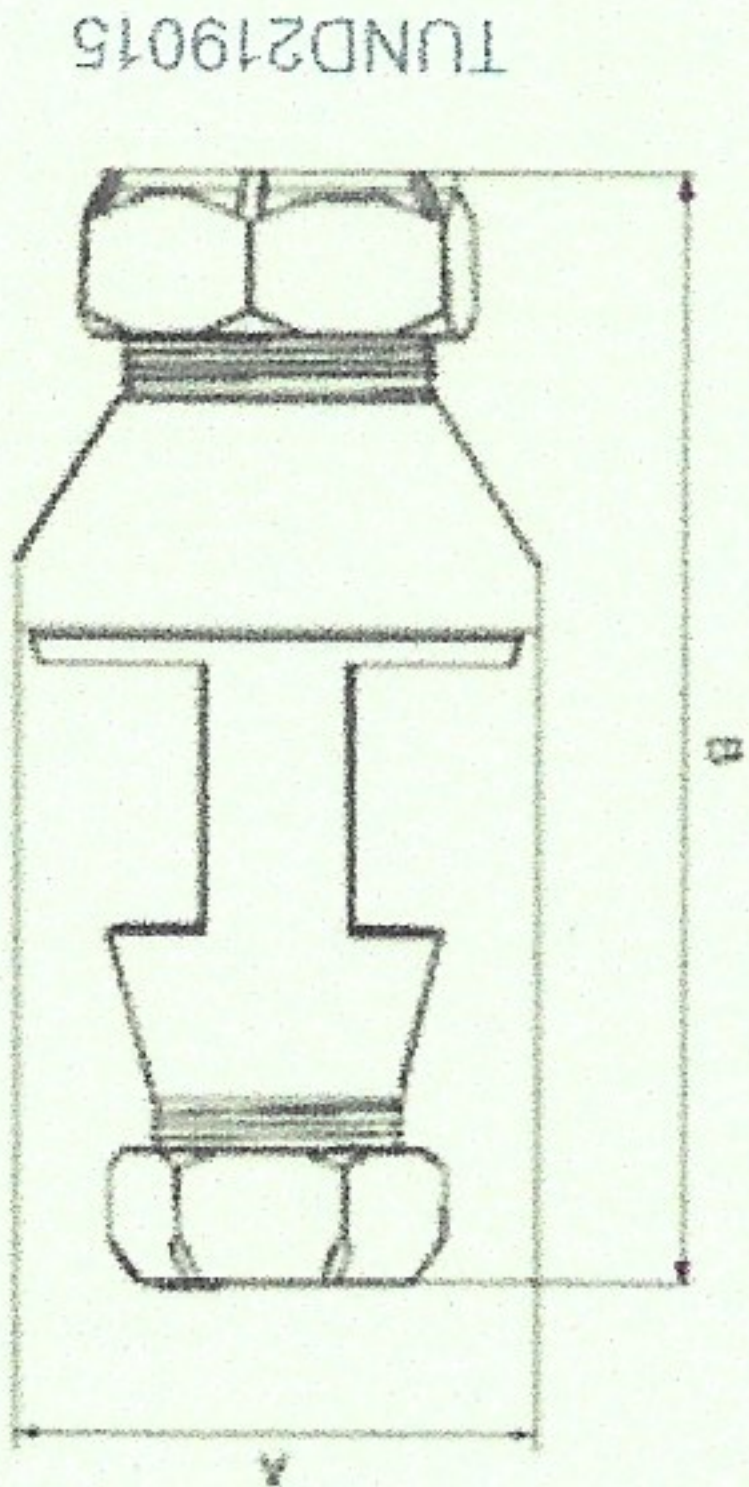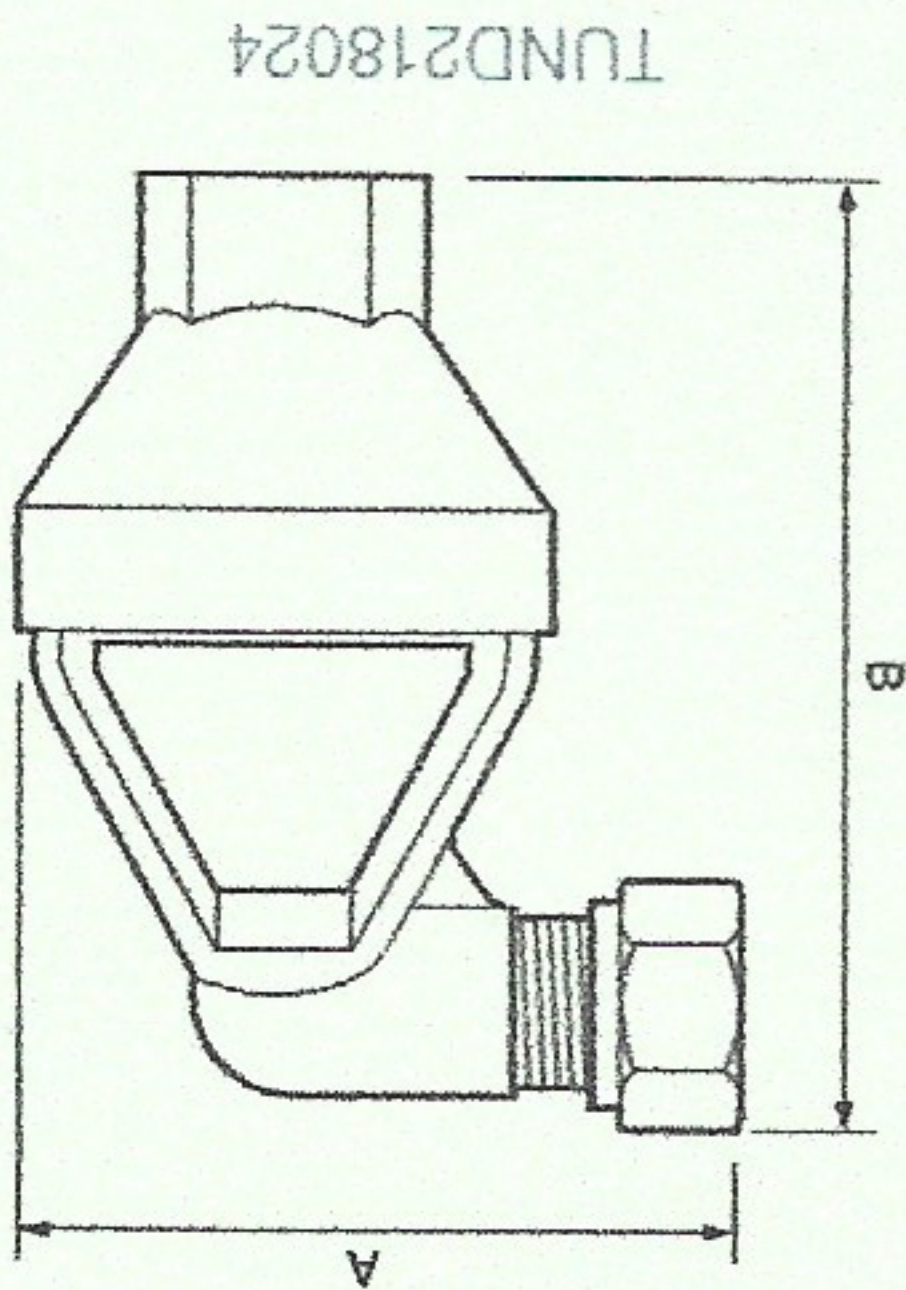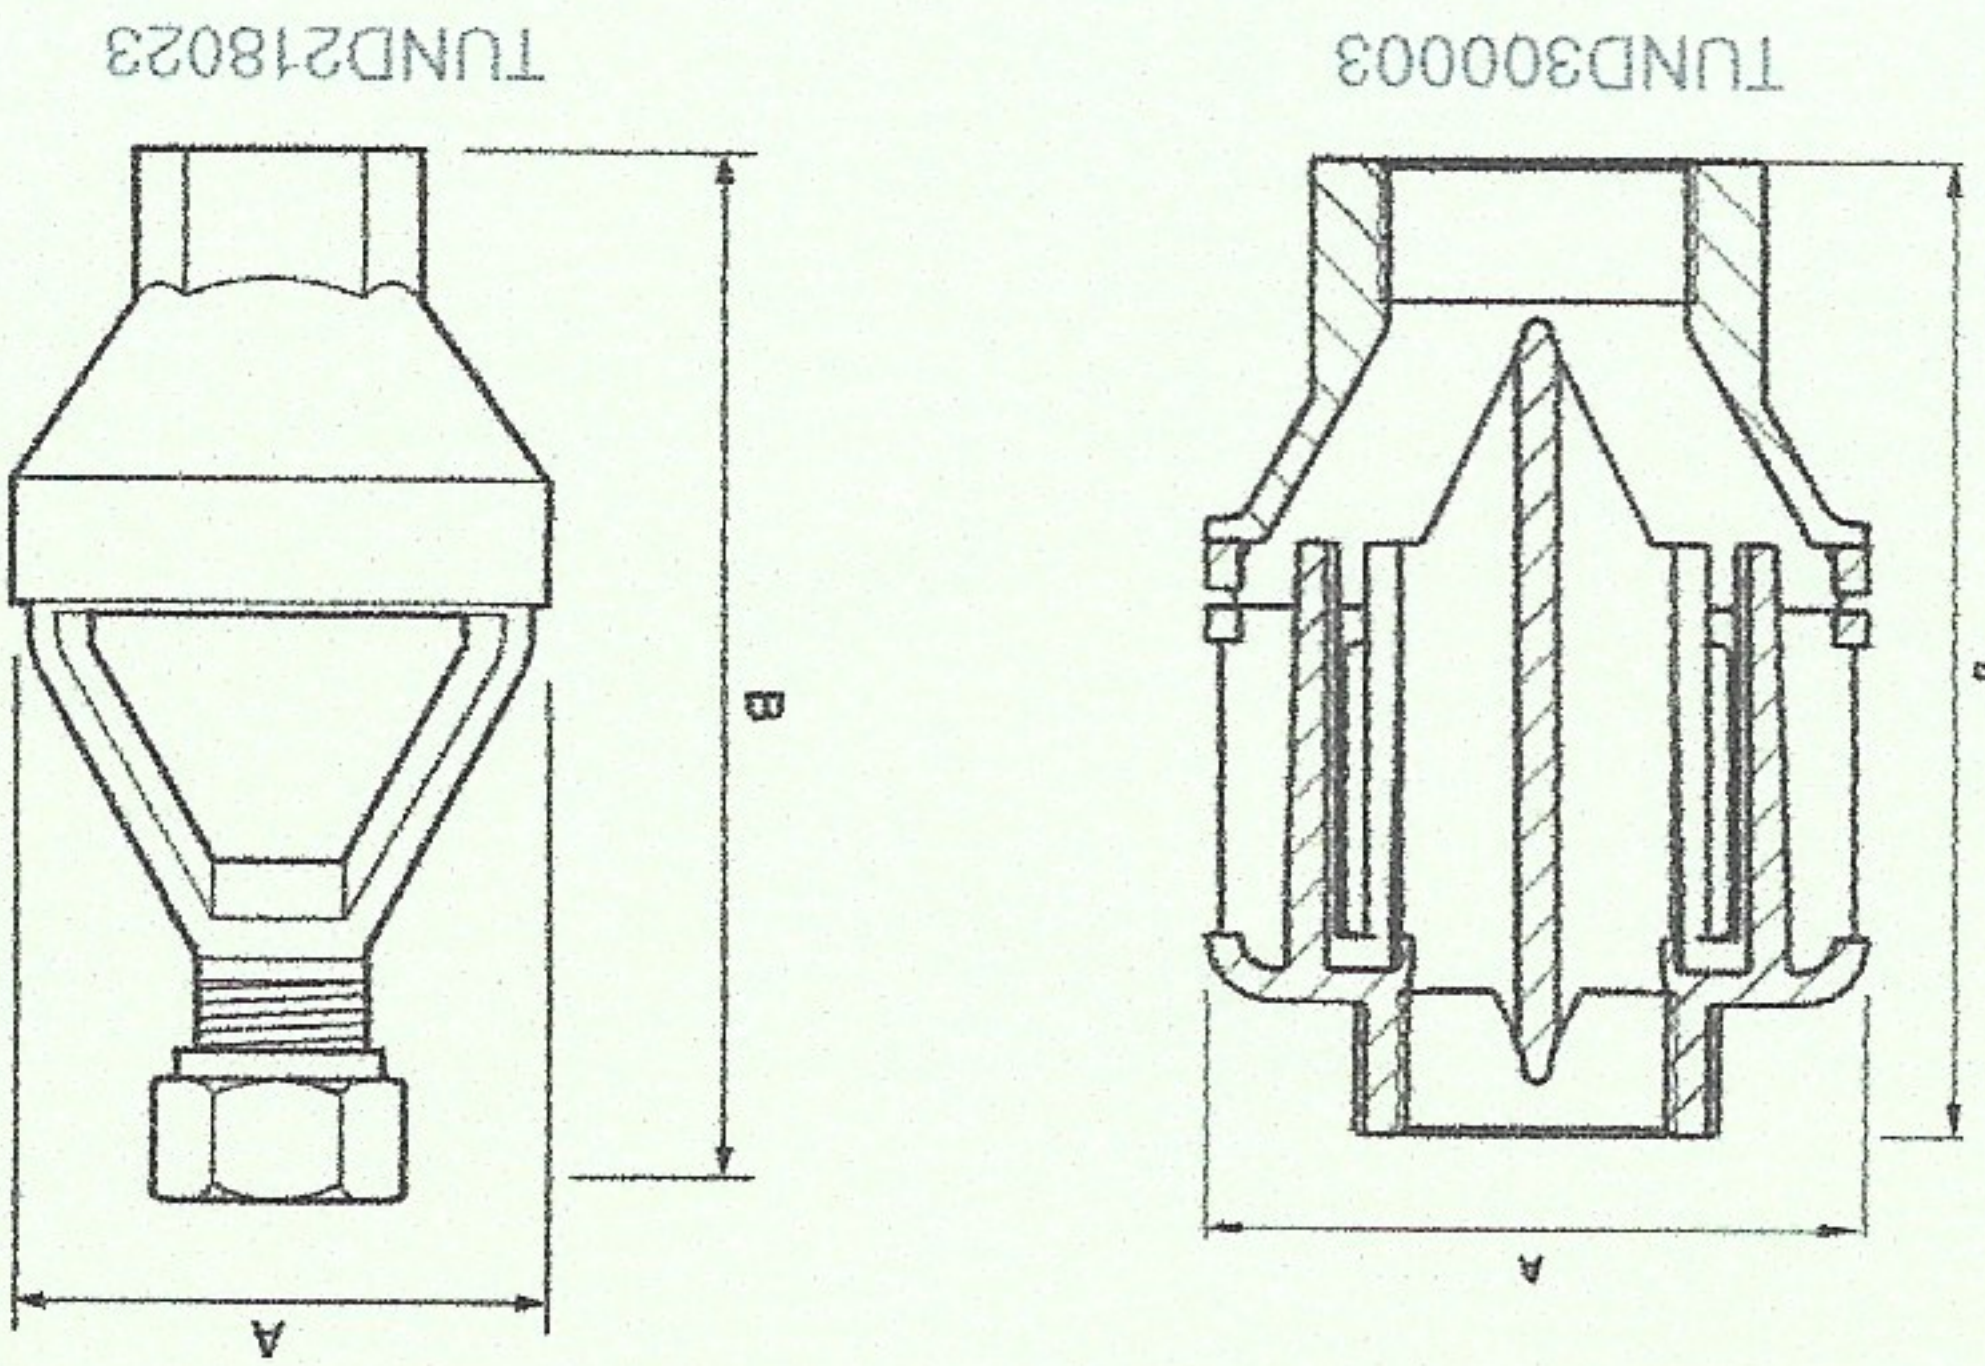

Type	A	B
TUND219005	37	112
TUND218024	50	92
TUND219015	57	120
TUND218023	64	125
TUND300001	87	213
TUND300003	102	148
TUND300004	160	300
TUND300005	164	333