

WINDSOR TALL GATE

INSTRUCTIONS

CONTENTS

- 1 x Lock box
- 2 x (10 x 25mm) Bolts on hinges to gate
- 8 x (5 x 50 mm) Screws on hinges to wall
- 4 x (5 x 50 mm) Screws on lock box

OPENING DIMENSIONS

Height	Width
1880mm (6'2")	914mm (3')

GUIDE

Fix hinges to brick/timber (Fig 1 & Fig 2). Select opening side of gate, as shown in Lock detail. Line up Lock Box and fix to brick/timber.

NOTES

Nyloc nuts are supplied, these need to be tightened with spanners through the plastic washer in the nut, they are designed to deter easy removal of the gate.

PAINTING

BLACK FINISH PRODUCT

A further coat of good quality gloss paint is required.

GALVANISED FINISH PRODUCT

- 1) DO NOT paint within 6 months of installation.
- 2) Lightly sand and wash down with fresh water and allow to dry.
- 3) Apply one coat Metal Primer.
- 4) Apply final coat of good quality gloss paint.

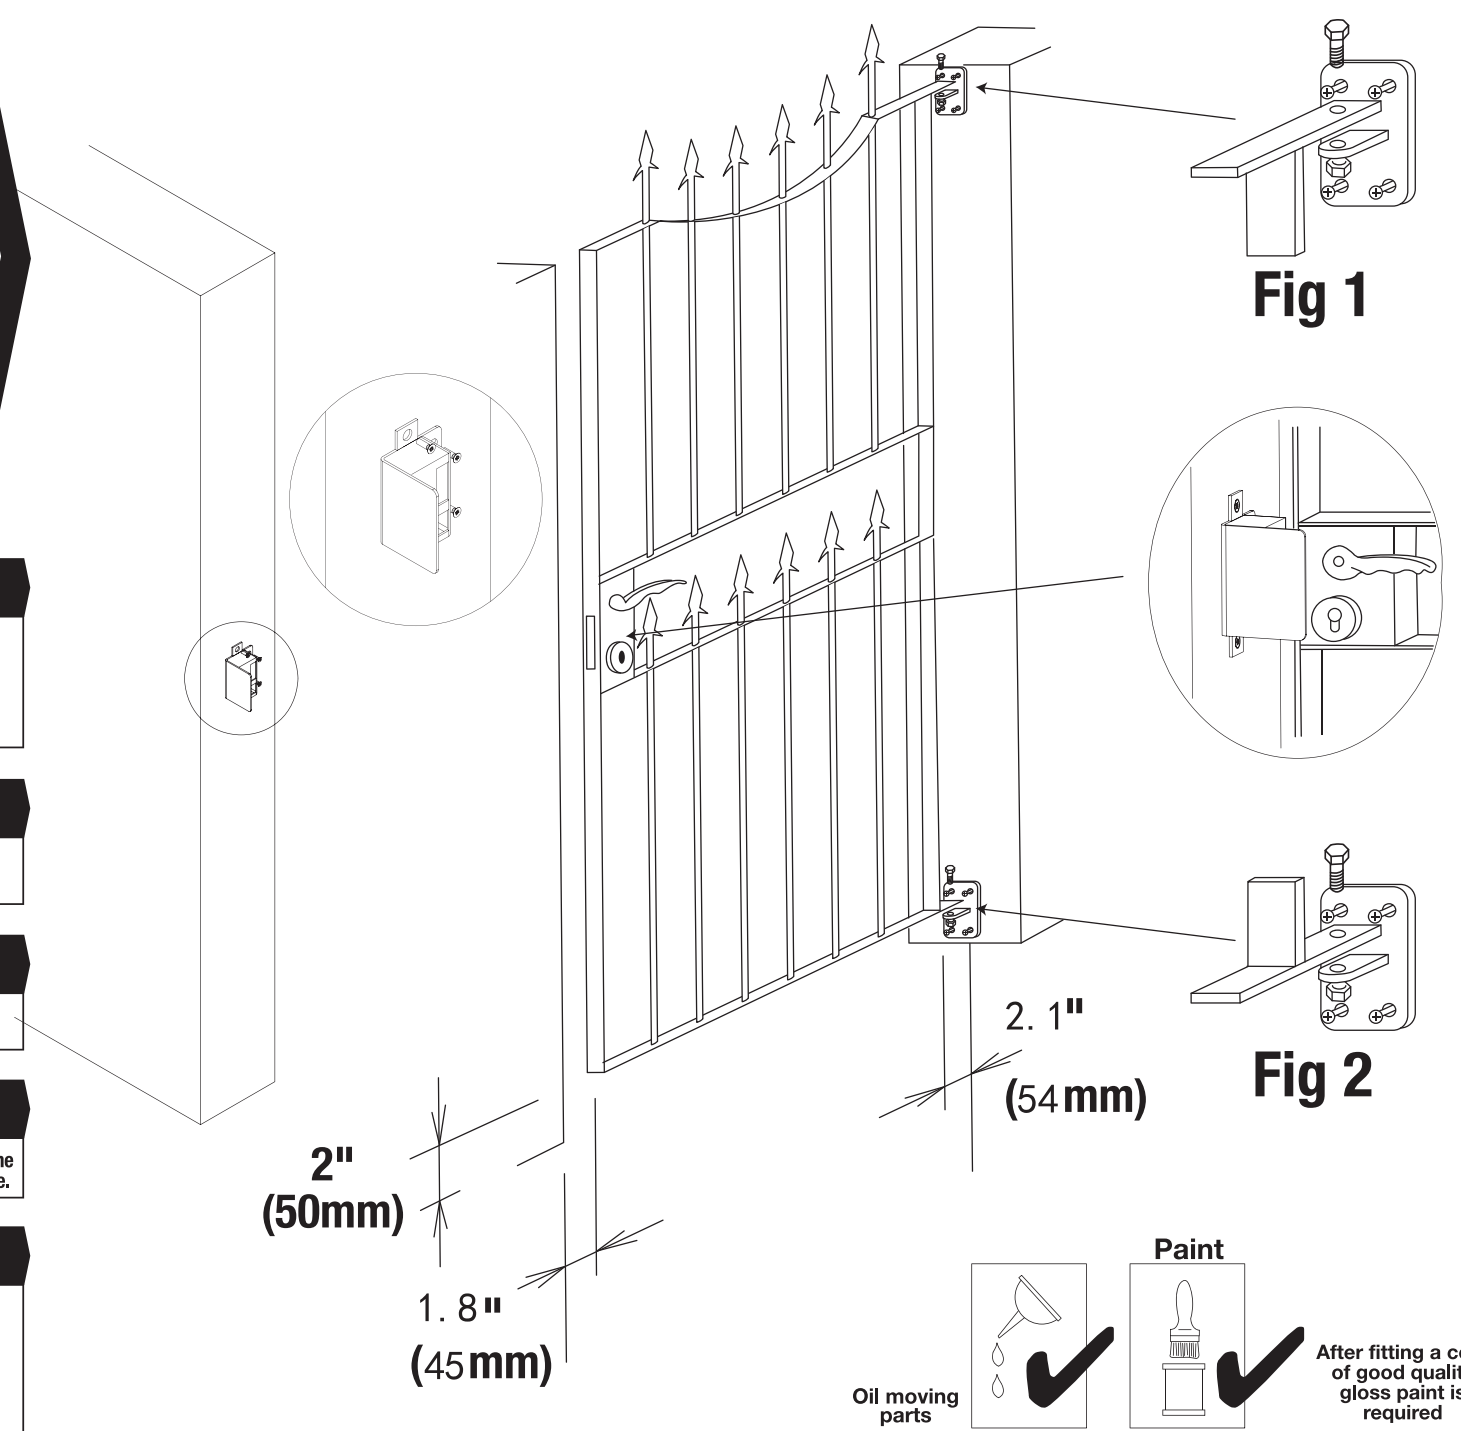




Fig 1

Fig 2

Paint



Oil moving parts



Paint

After fitting a coat of good quality gloss paint is required