



Permanent Drive Repair[®]

COLD LAY ASPHALT



15kg

- Drives, Roads & Paths • 6mm Graded Stone • 1 Unit Covers 0.6m² at 12mm
- 5 Year Guarantee • Instantly Trafficable



STEP TO STEP GUIDE

Description

UltraTrade Permanent Drive Repair is a rapid curing, permanent cold-lay surfacing material suitable for driveway, footpaths and road repairs.


The product utilises an innovative reactive binder based on renewable materials and contains no solvents. The curing reaction is activated by the addition of water, producing a durable, first-time permanent repair. Once compacted, the repair can be opened instantly to traffic.

Preparation & Applications

UltraTrade Permanent Drive Repair is suitable for:

- Driveways
- Footpaths
- Roads and general surfacing repairs

The product is designed to provide a permanent repair solution and is compatible with existing surfaces.

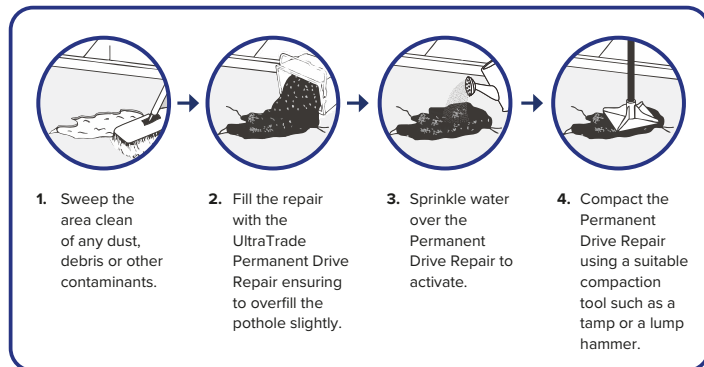

Features & Benefits

- Rapid curing formulation
- Water-activated reactive binder
- First-time permanent repair
- Instantly trafficable
- Solvent-free formulation
- Based on renewable materials

Technical

UltraTrade Permanent Drive Repair incorporates a specially formulated binder system that reacts with water to cure rapidly and deliver a durable repair.

Application

Repairs can be carried out quickly and efficiently using the following method:

1. Sweep the area clean of dust, debris and loose material.
2. Fill the repair area, slightly overfilling the surface.
3. Sprinkle water over the material to activate the binder.
4. Compact using a suitable compaction tool such as a tamp or lump hammer.

Coverage

Approx. 0.6m² at 12–15mm depth per unit (depending on surface regularity).

Storage

Store in a dry, well-ventilated area at temperatures between 5°C and 30°C.

Shelf Life

6 months from the date of manufacture in sealed units, stored in the above conditions. Once opened, all material should be used up.

Health, Safety & Environmental

Please ensure that appropriate PPE is used when preparing, mixing and applying products. Always wash your hands before consuming food and make sure that materials are kept safely out of reach of children and animals. Please dispose of packaging and waste responsibly and in accordance with local authority requirements. A full material datasheet relating to this product is available from myultrade.com.

Quality Assurance

All products are manufactured under a quality management system conforming to BS EN ISO 9001. Products are guaranteed against defective materials and manufacture; however, no liability can be accepted for application or use beyond our control.